




中意信诚 - 高端进口五金



幽灵门 五金解决方案



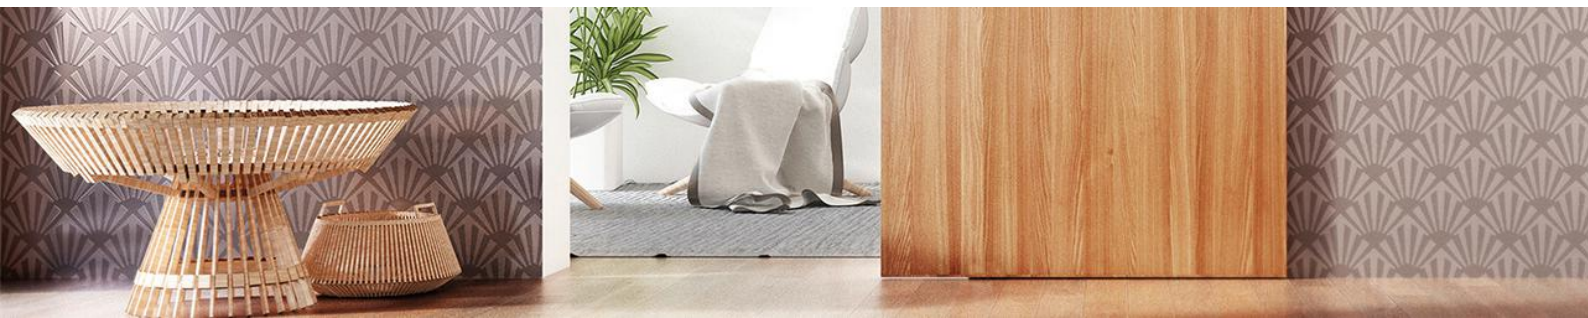

目录

幽灵门五金- 木门版

p3-7



幽灵门五金- 无框玻璃门版

p8-12



幽灵门五金- 窄框玻璃门版

p13-18



安装&调试

p19-20

**微信扫一扫
观看安装视频

HIDDEN

木门版

隐藏式上下轨道


适用最大门重80kg


适用最小门厚40mm

开关门阻尼缓冲

规格：标准轨道1150mm


加长轨道1530mm




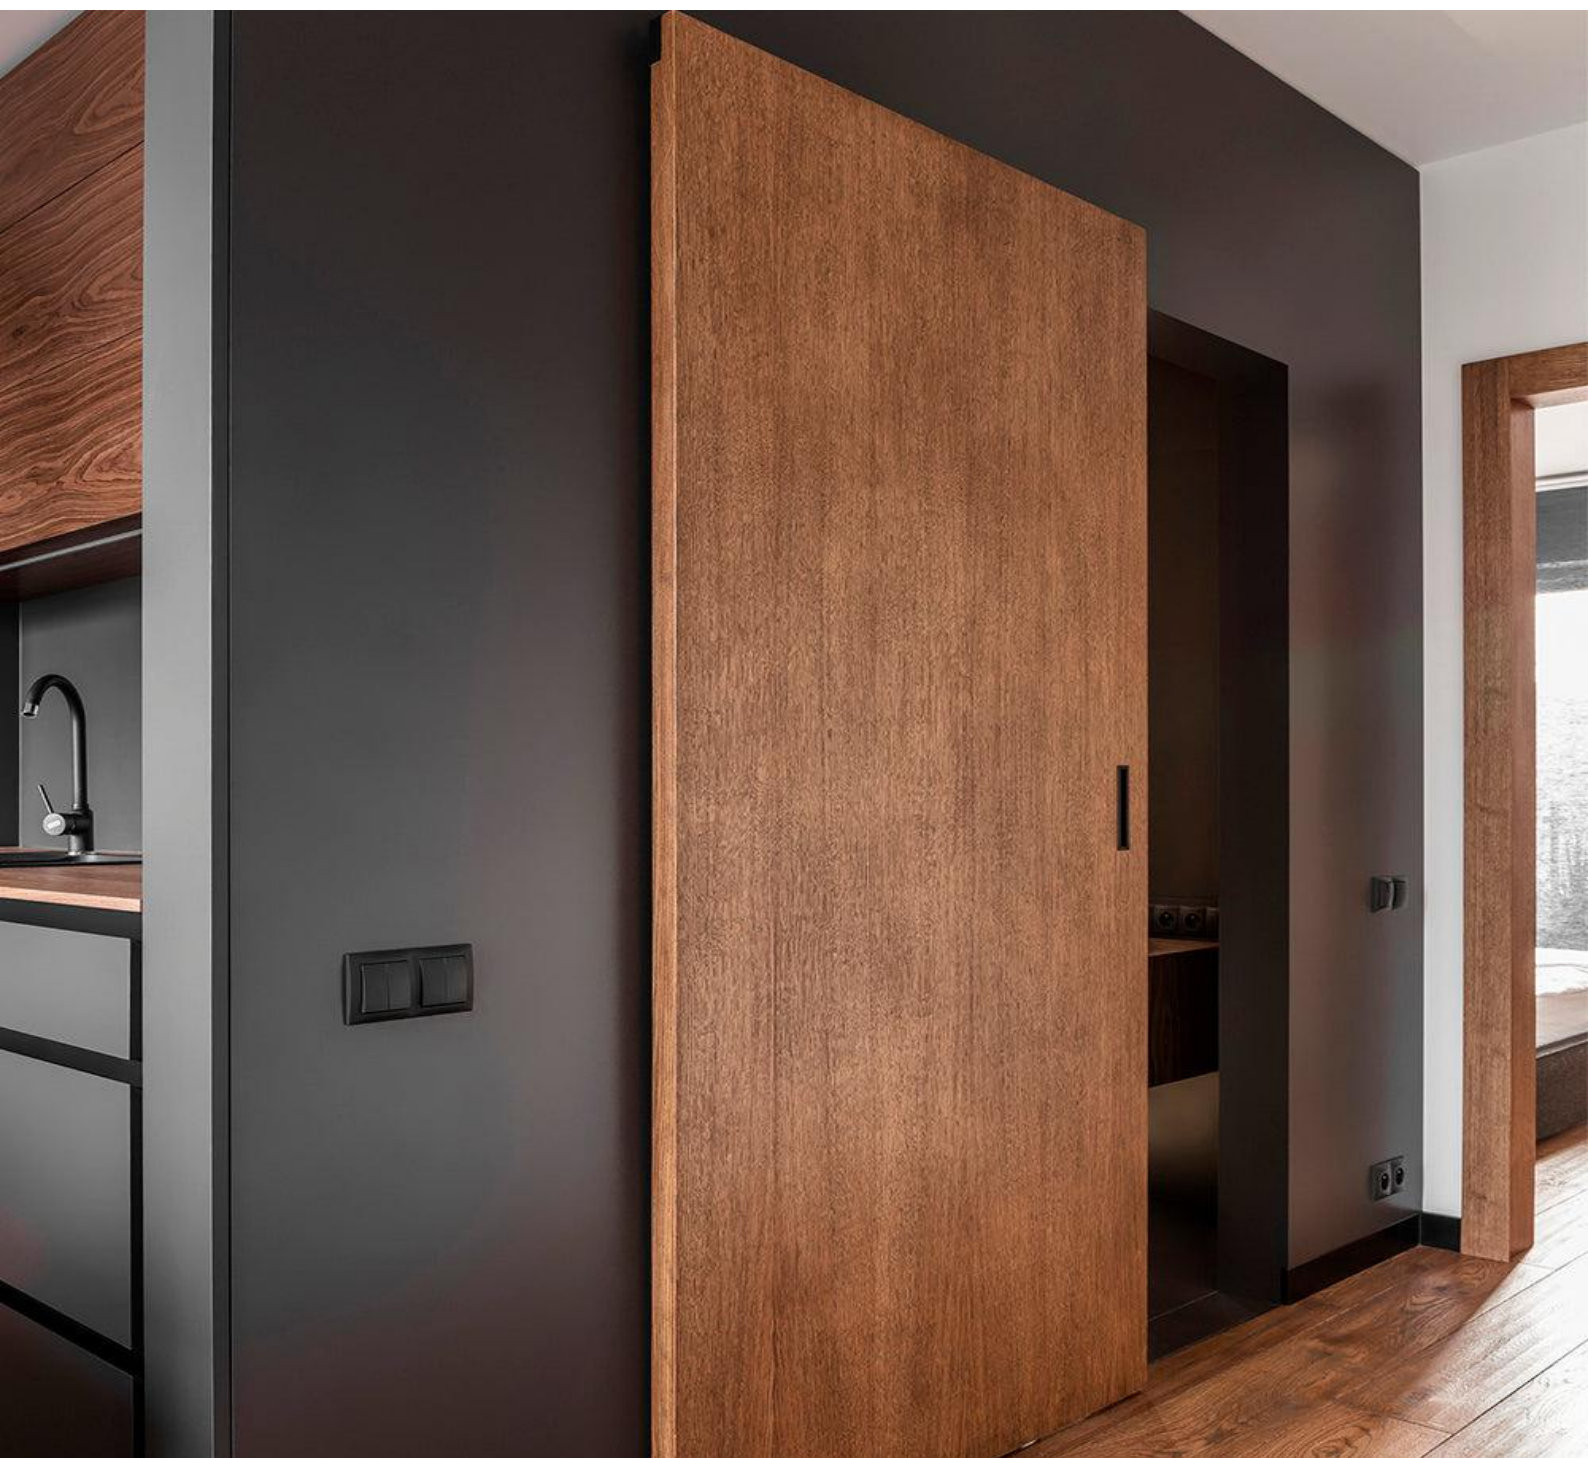


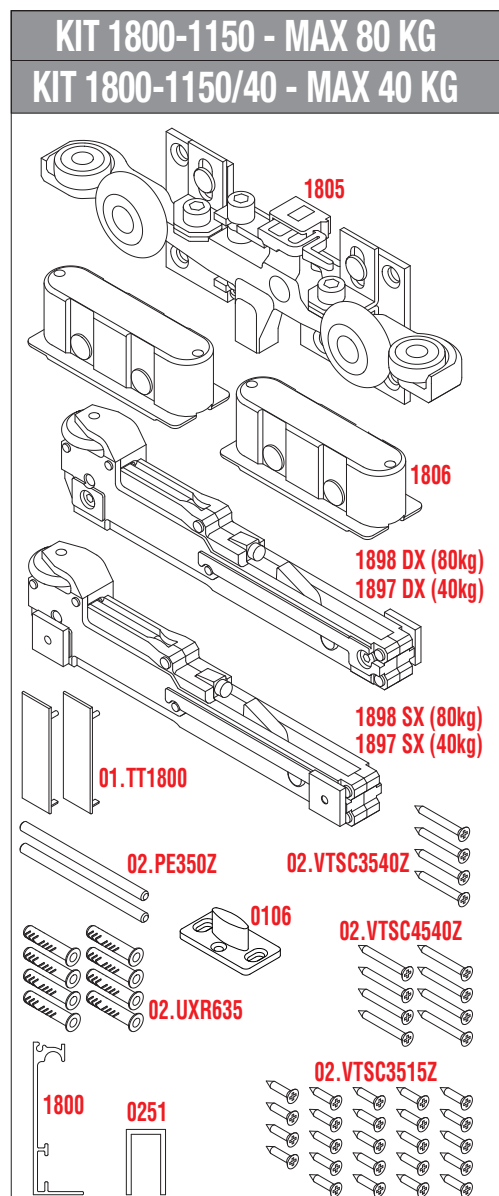


配件明细

1805	Guida superiore regolabile Adjustable upper truck
1806	Carrello inferiore Lower truck
0106	Guida inferiore Lower runner
01.TT1800	Tappo terminale End cover
1898 DX-SX	Decelerante DX-SX (80kg) Soft Closing Stopper R-L (80kg)
1897 DX-SX	Decelerante DX-SX (40kg) Soft Closing Stopper R-L (40kg)
02.PE350Z	Perno Pin
02.VTSC3515Z	Vite 3.5x15 Screw 3.5x15
02.VTSC3540Z	Vite 3.5x40 Screw 3.5x40
02.VTSC4540Z	Vite 4.5x40 Screw 4.5x40
02.UXR635	Tassello Dowel
1800	Profilo superiore L=1150mm Upper profile L=1150mm
0251	Profilo inferiore Lower profile

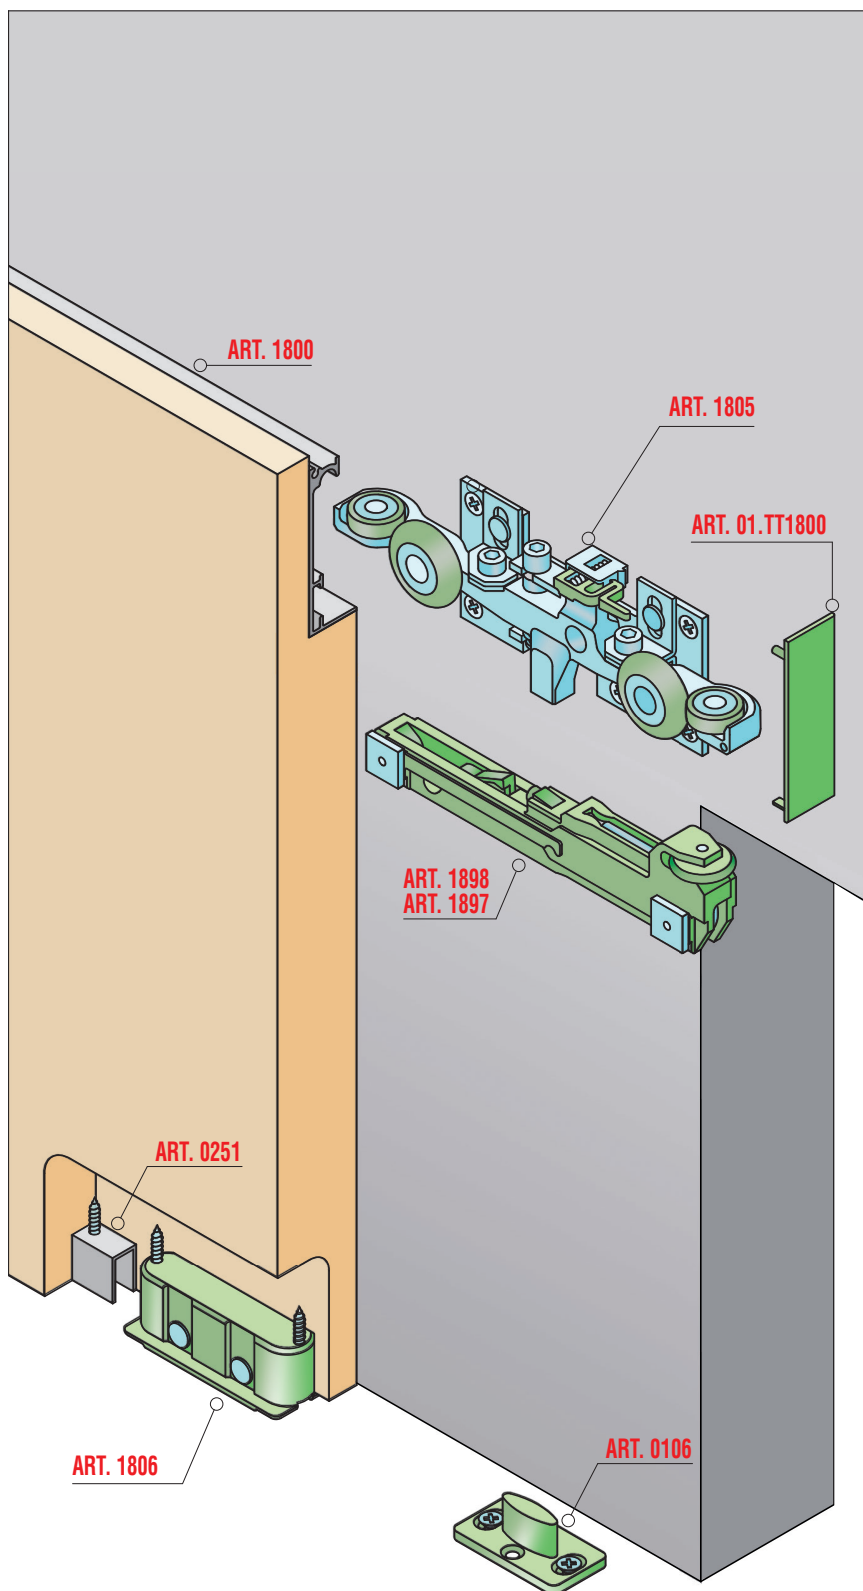

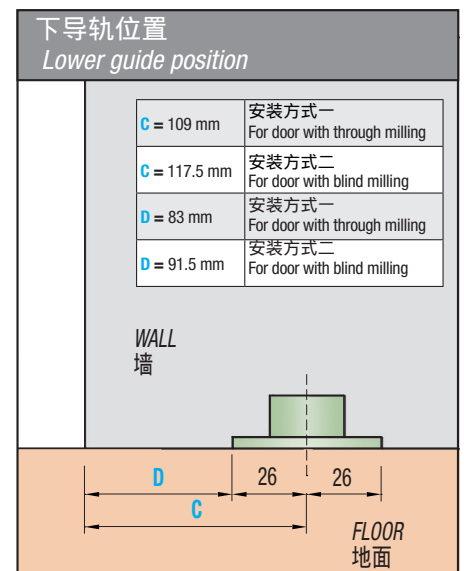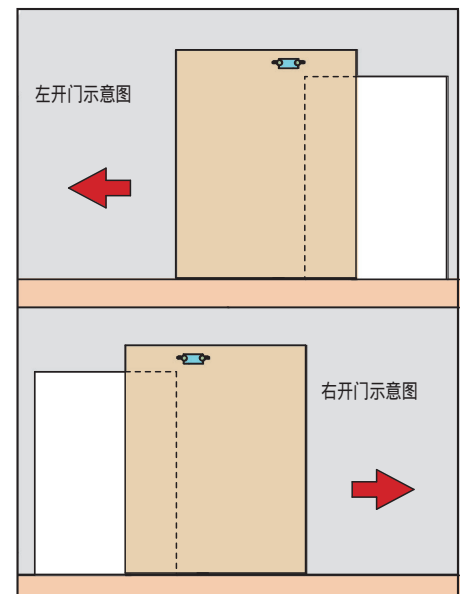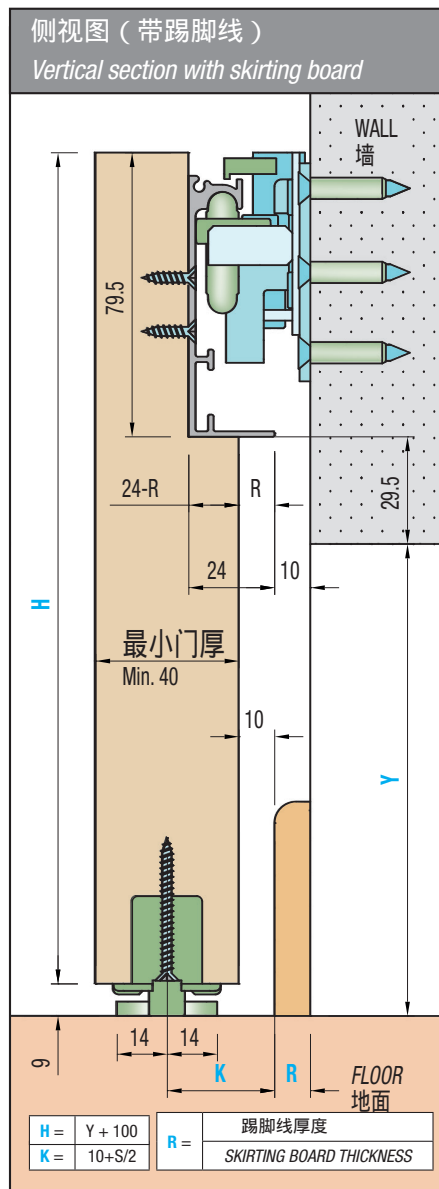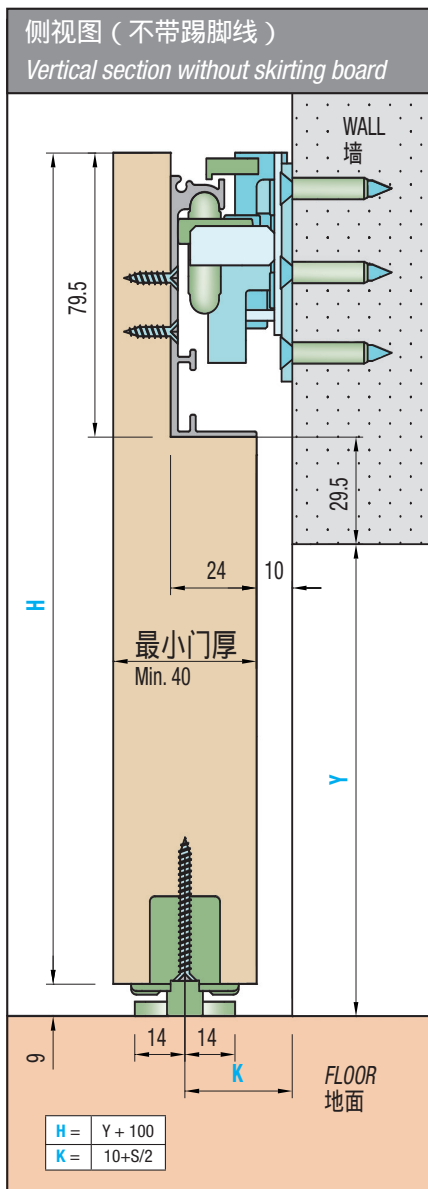


两种安装方式

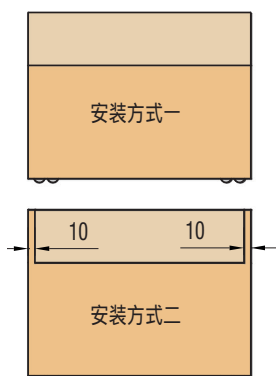


安装方式一：
门板穿透，导轨明装，末端贴片。


安装方式二：
门板不穿透，导轨暗藏。

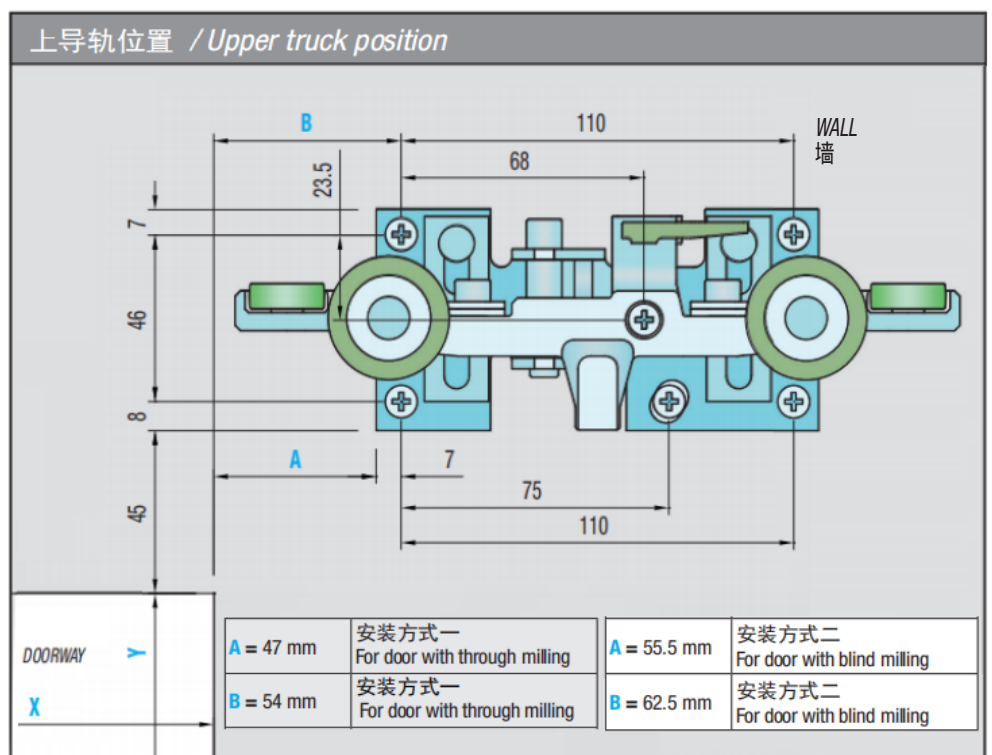

安装方式一标准尺寸图
Standard dimensions for door with through milling

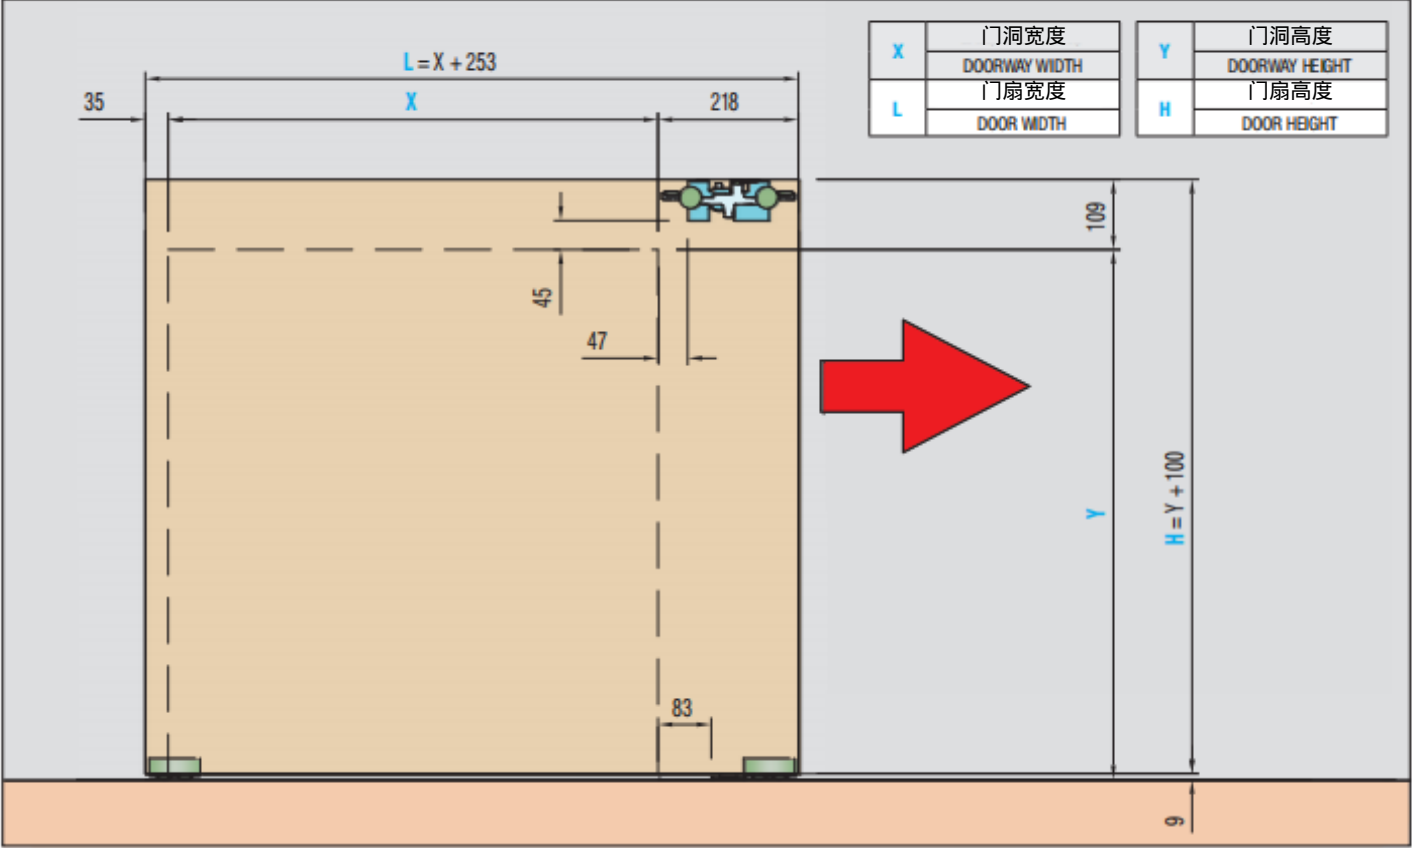


安装方式一开孔图
Door drilling with through milling

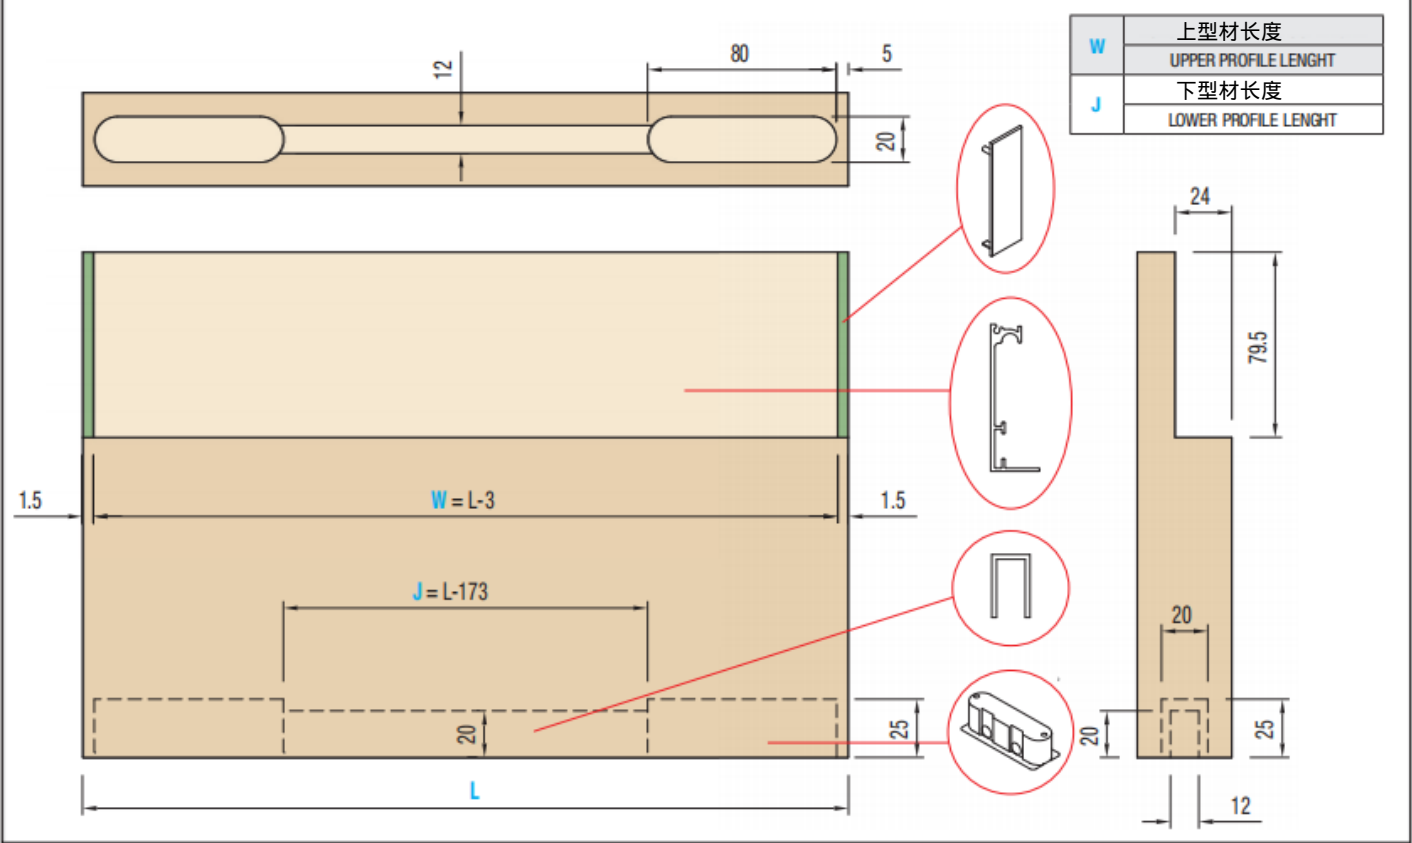


安装方式二标准尺寸图

Standard dimensions for door with blind milling

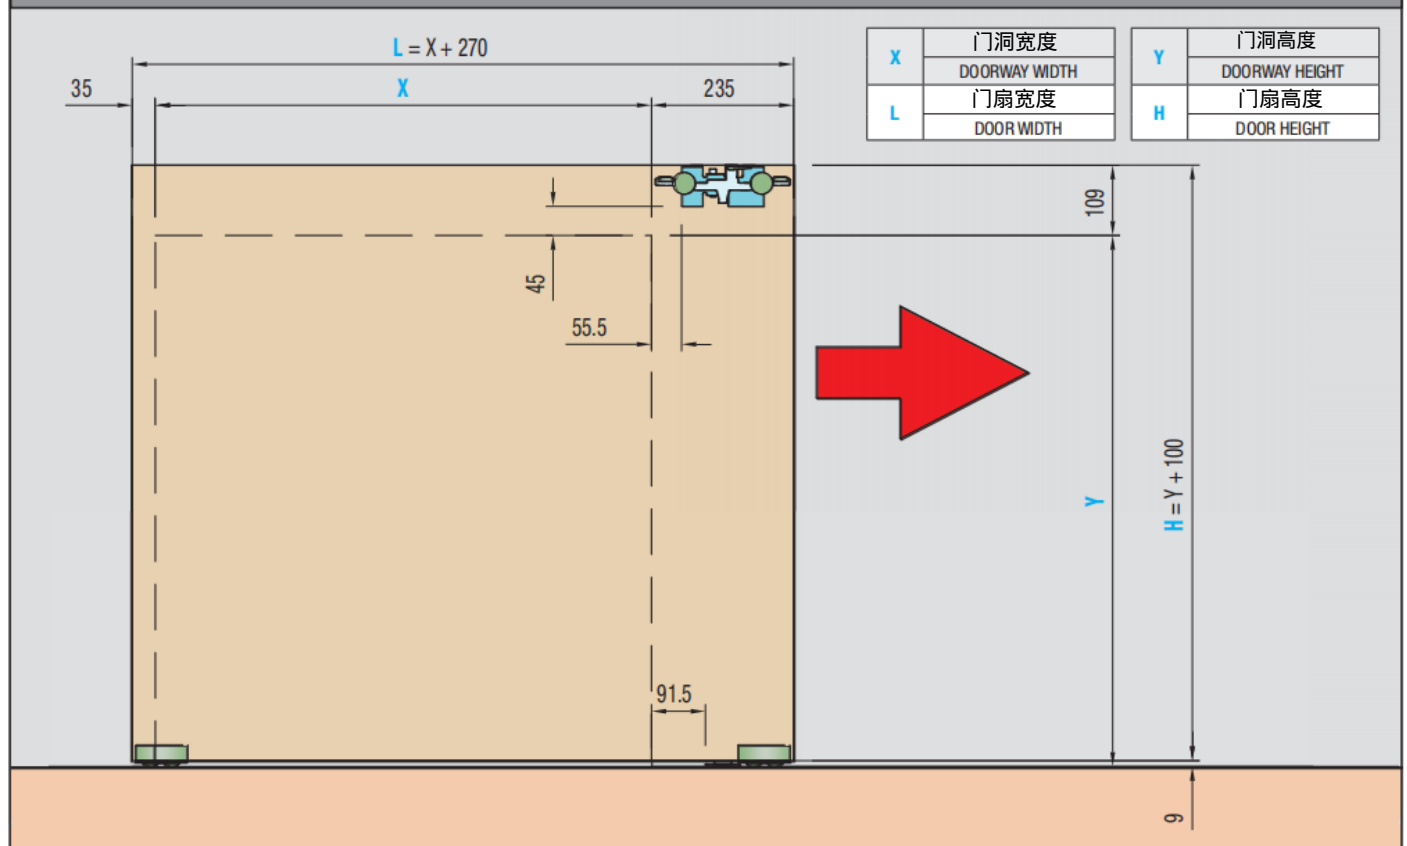

安装方式二门开孔图

Door drilling with blind milling

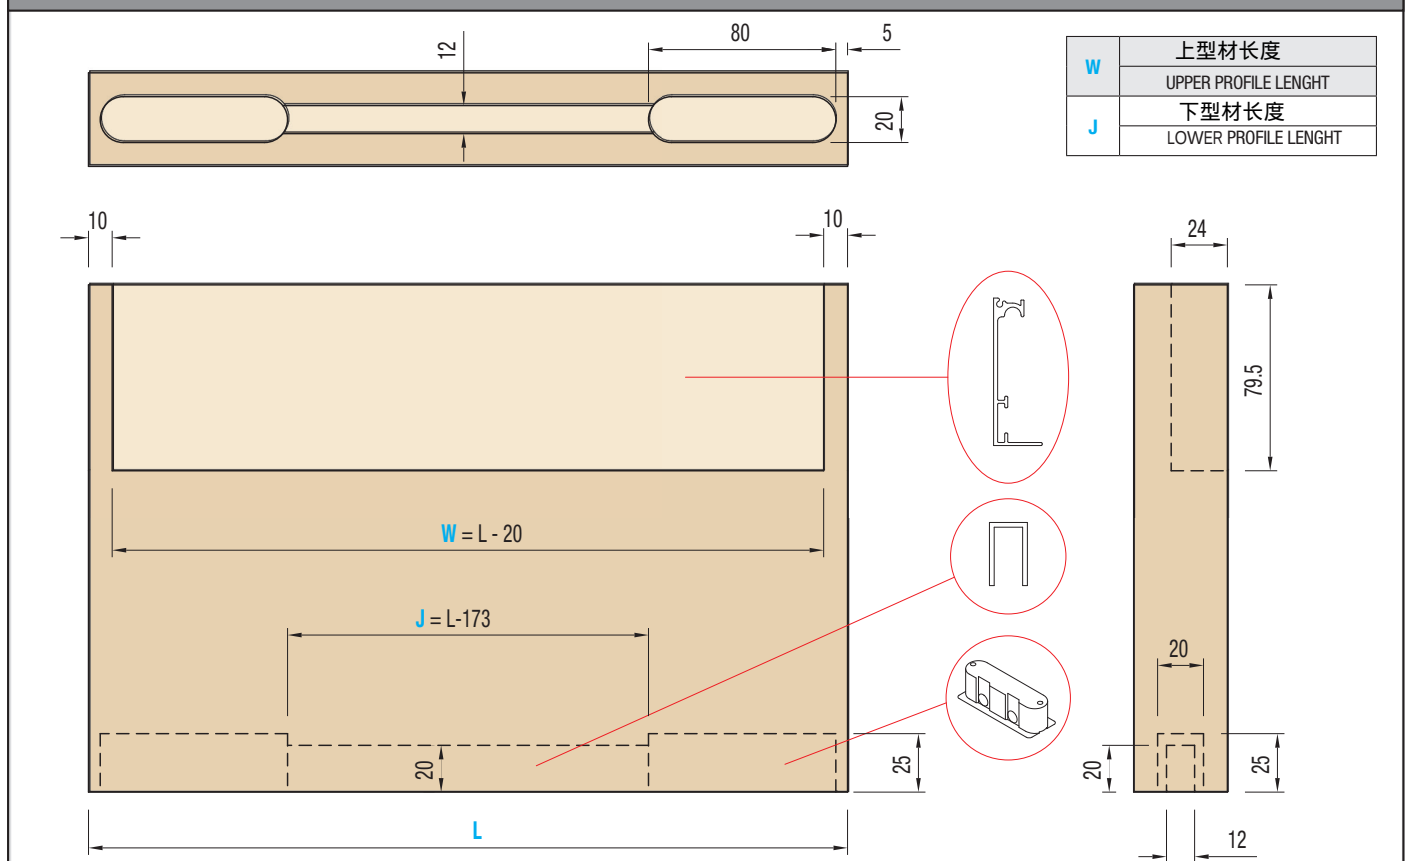

HIDDEN
GLASS

无框玻璃门版

隐藏式上下轨道

适用最大门重80kg

玻璃厚度8/10/12mm


开关门阻尼缓冲

规格：标准轨道1150mm

加长轨道1450mm






KIT 1800-1150 V - MAX 80 KG KIT 1800-1150/40 V - MAX 40 KG

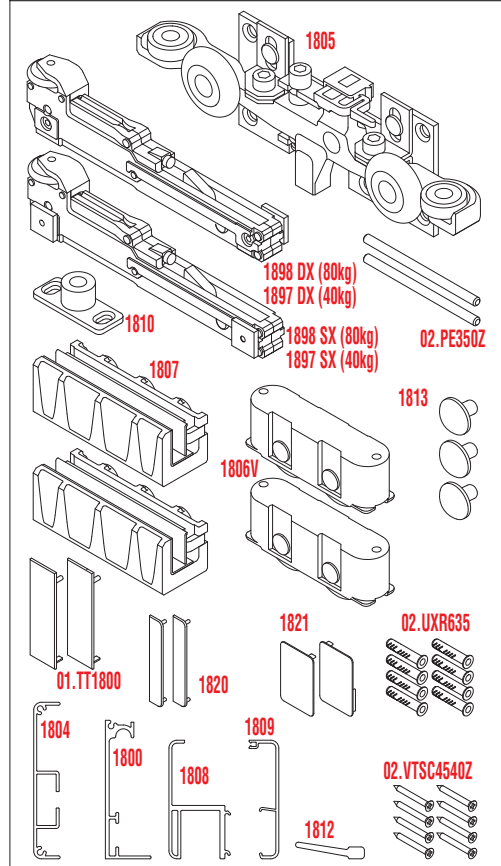


配件明细

1805	Guida superiore regolabile Adjustable upper truck
02.PE350Z	Perno Pin
1898 DX-SX	Decelerante DX-SX (80kg) Soft Closing Stopper R-L (80kg)
1897 DX-SX	Decelerante DX-SX (40kg) Soft Closing Stopper R-L (40kg)
1810	Guida inferiore Lower runner
1806V	Carrello inferiore Vetro Glass Lower truck
1807	Pinza Vetro Glass Clamp
1813	Borchia Vetro Glass Stud
01.TT1800	Tappo terminale End cover
1820	Tappo terminale End cover
1821 DX-SX	Tappo Terminale DX-SX End Cover R-L
02.UXR635	Tassello Dowel
02.VTSC4540Z	Vite 4.5x40 Screw 4.5x40
1812	Labbro Parapolvere L=1150mm Dust Lip L=1150mm
1800	Profilo superiore L=1150mm Upper profile L=1150mm
1808	Profilo inferiore L=1150mm Lower profile L=1150mm
1809	Copertura inferiore L=1150mm Lower Cover L=1150mm
1804	Copertura superiore L=1150mm Upper Cover L=1150mm

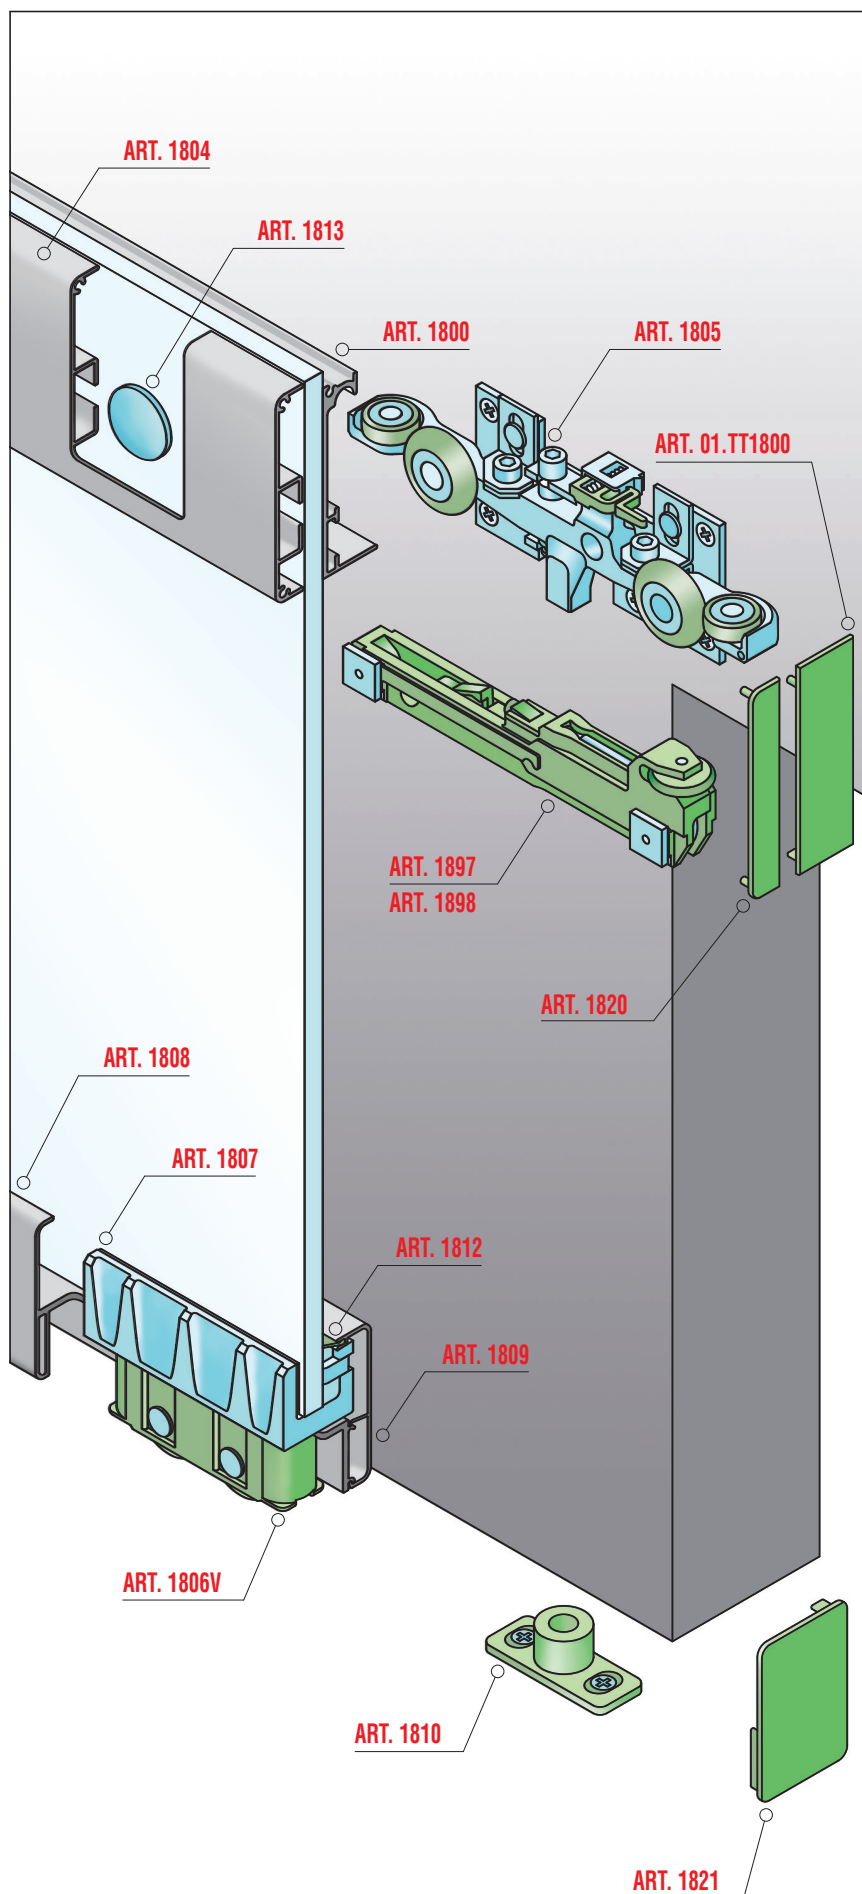


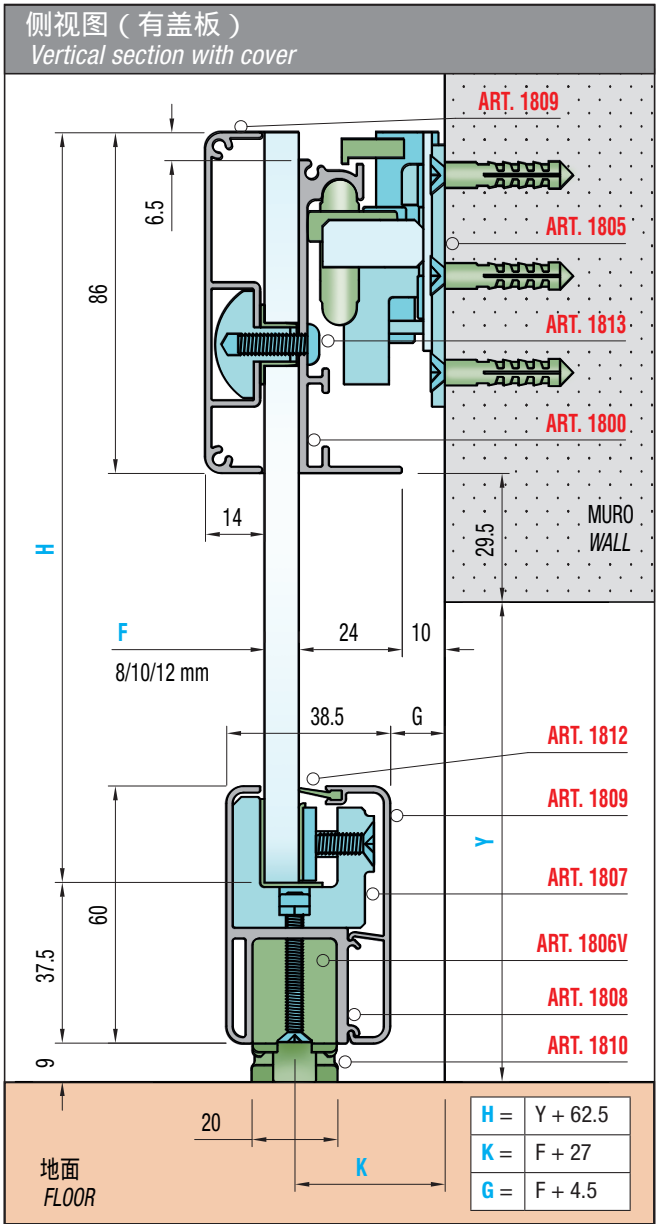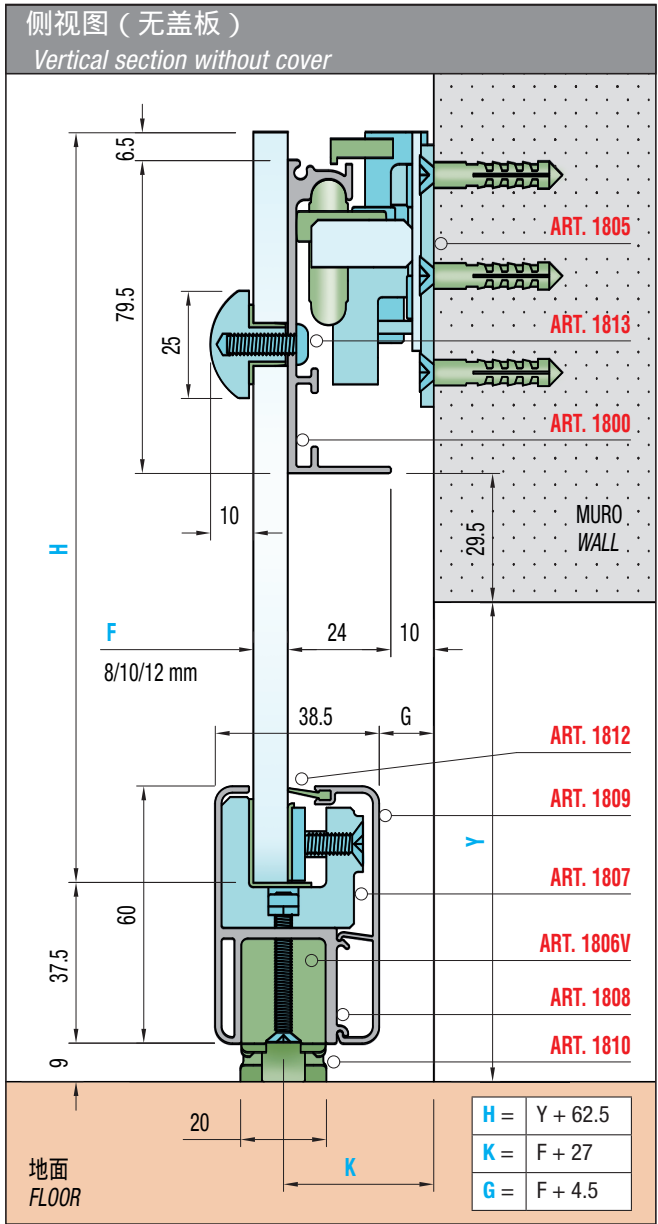


玻璃开孔图 / Glass door drilling

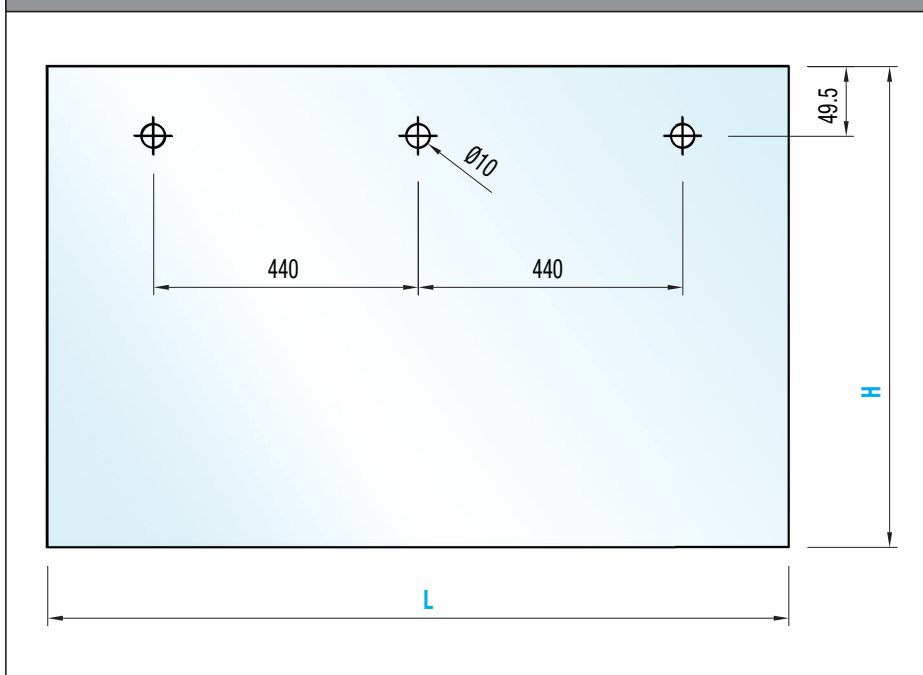


左开门示意图

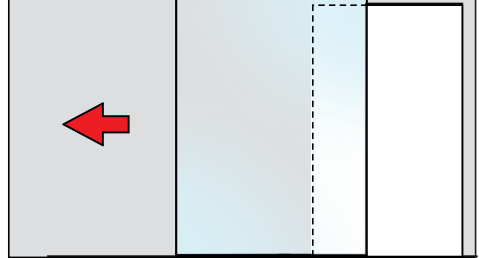


右开门示意图

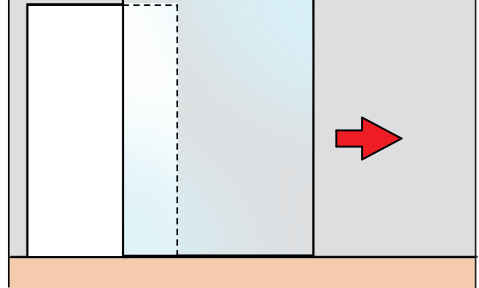


标准尺寸图 - 门洞完全外露
Standard dimensions for door with complete doorway opening

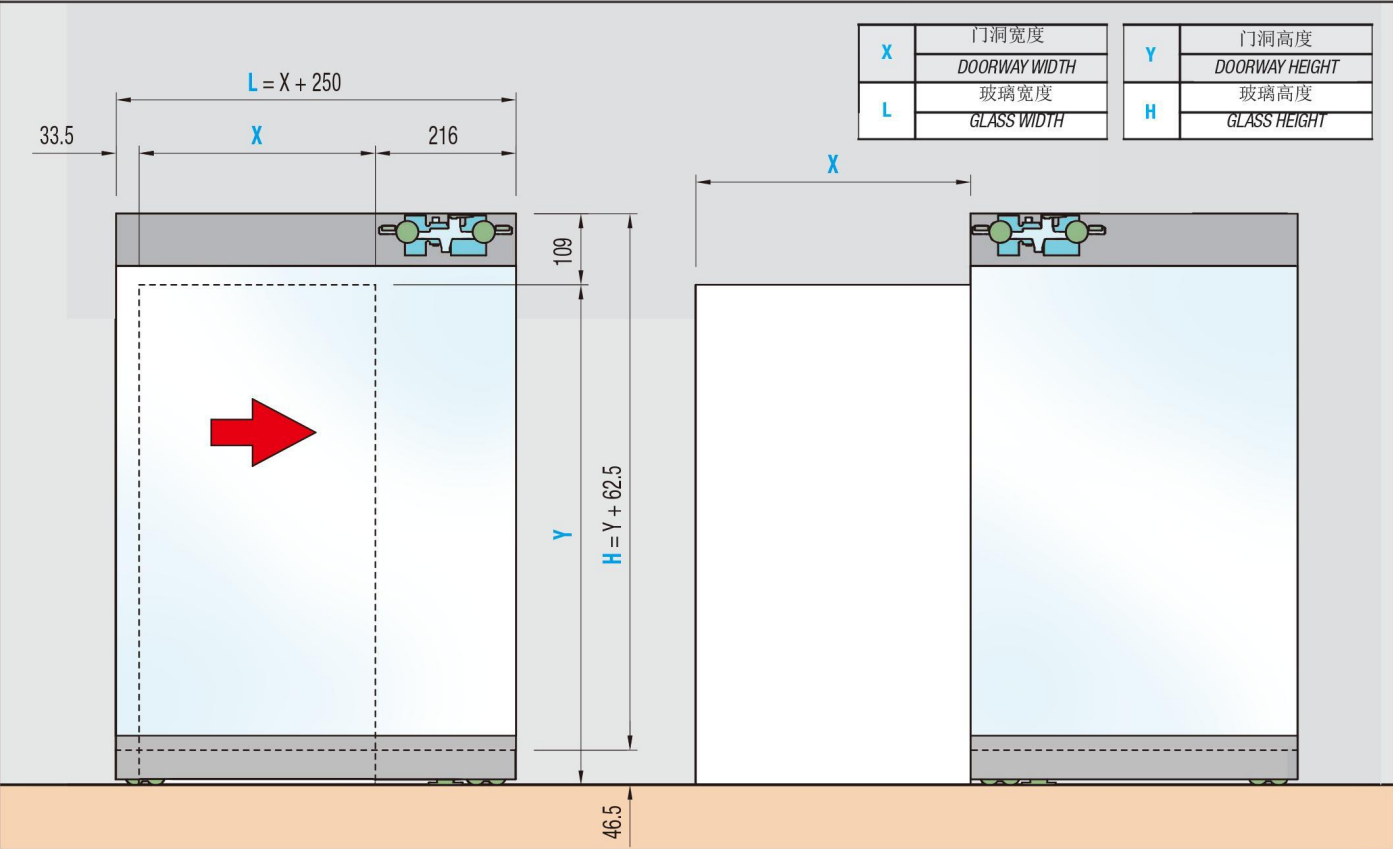


标准尺寸图 - 门洞部分遮挡
Standard dimensions for door with partial doorway opening

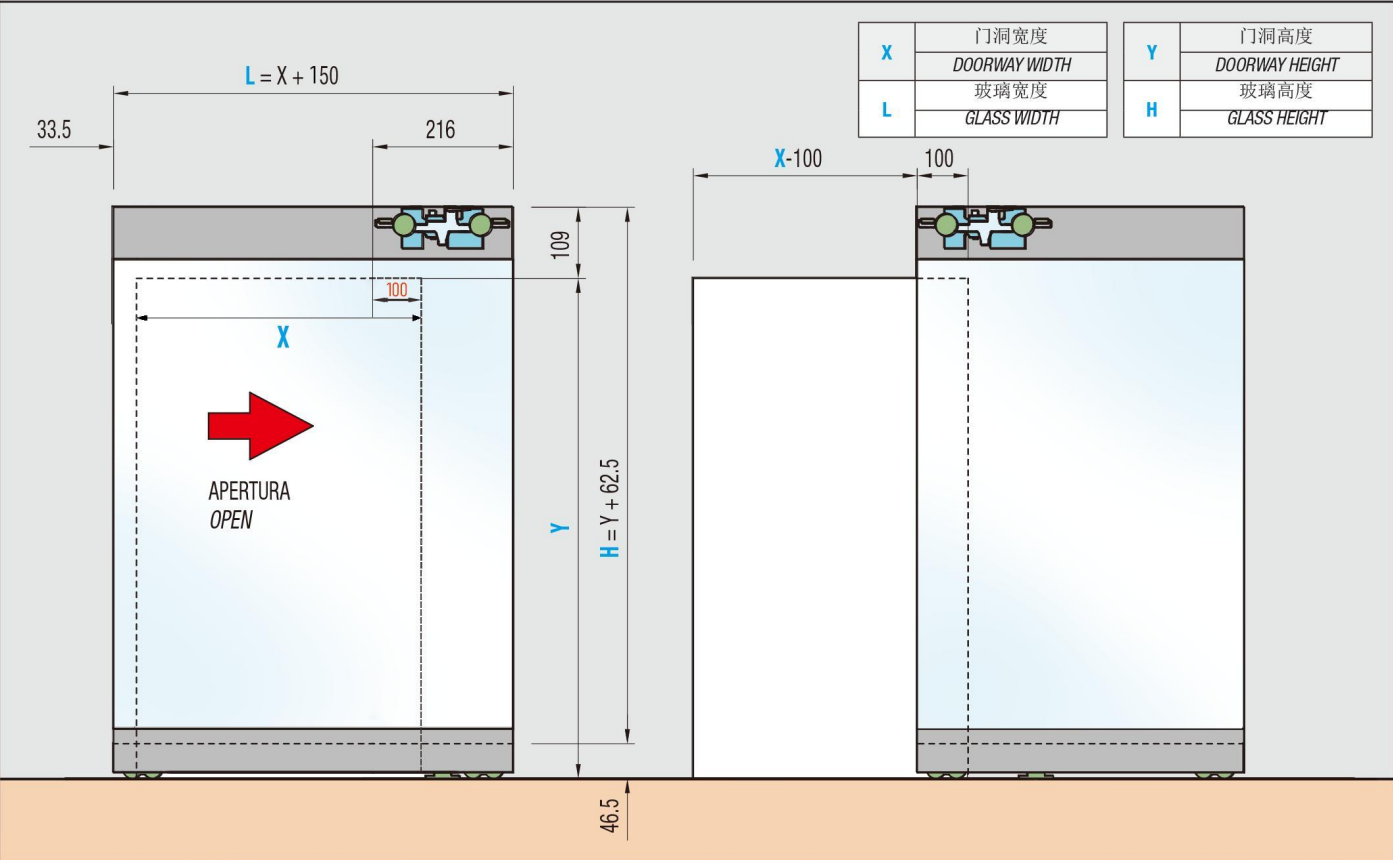


上下导轨位置 / Upper and lower guide position

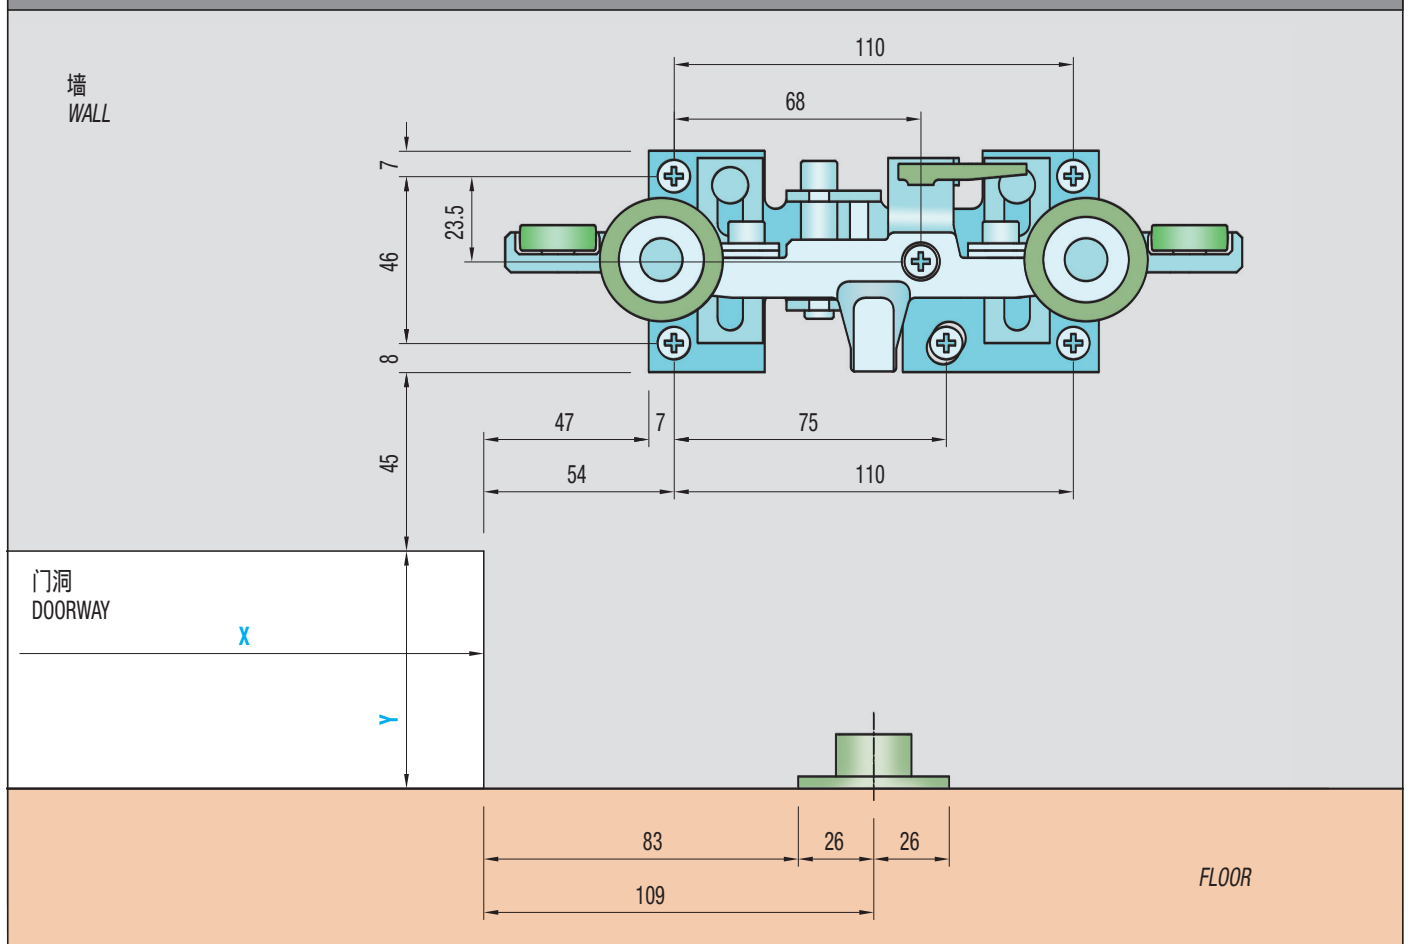

双向阻尼缓冲位置 - 完全开启 / Soft closing position for complete opening

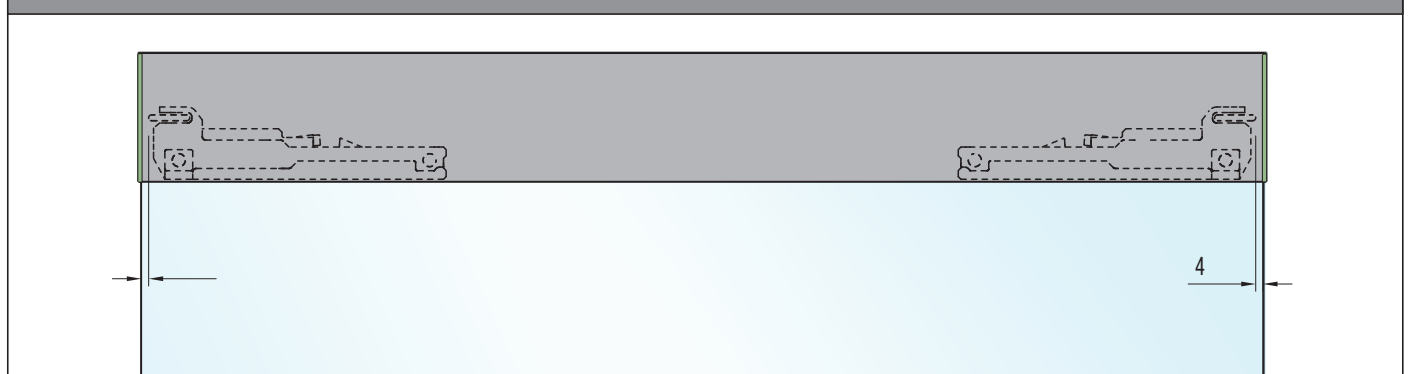

双向阻尼缓冲位置 - 部分开启 / Soft closing position for partial opening

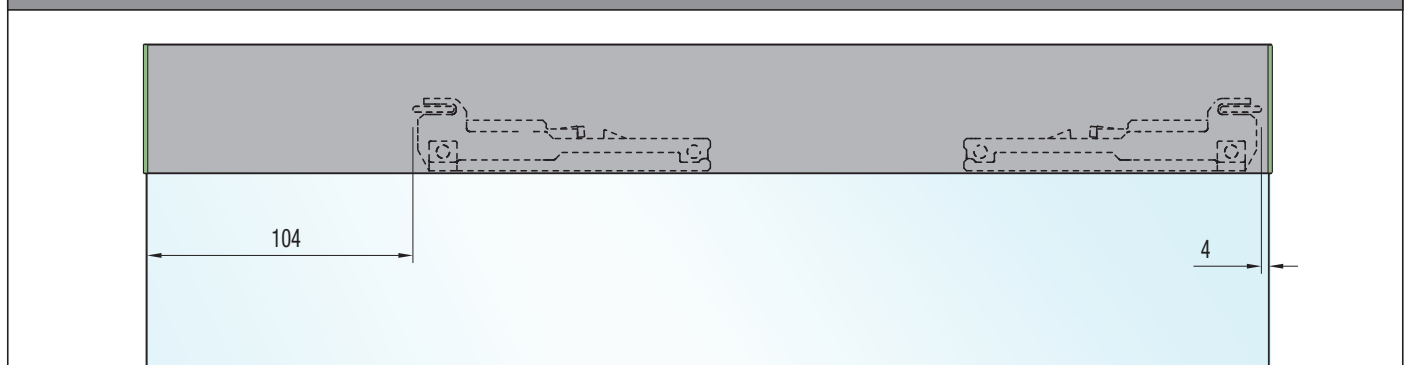

HIDDEN
ALU

窄框玻璃门版

KIT 1800-2240-1170 D 带窄边框型材

适用于窄框玻璃门

隐藏式上下轨道

适用最大门重80kg

玻璃厚度4mm


开关门阻尼缓冲

规格：标准轨道1150mm



KIT 1800-2240-1170 D - MAX 80 KG

KIT 1800-2840-1470 D - MAX 80 KG

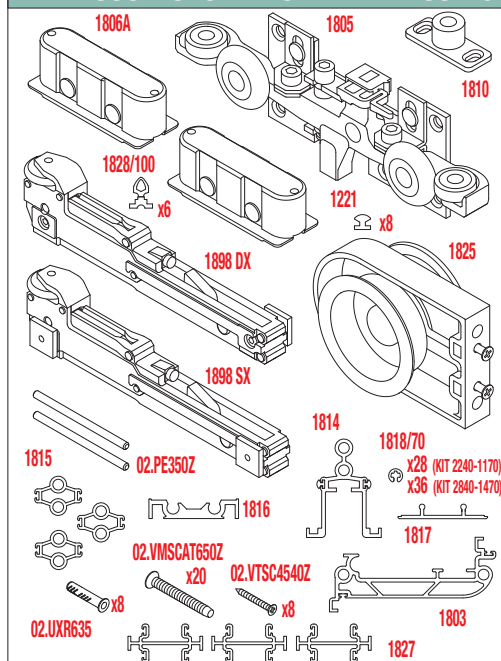

Legenda KIT / Kit Legend


1805	Guida superiore regolabile <i>Adjustable upper truck</i>
02.PE350Z	Perno <i>Pin</i>
1898 DX-SX	Decelerante DX-SX (80kg) <i>Soft Closing Stopper R-L (80kg)</i>
1810	Guida inferiore <i>Lower runner</i>
1806A	Carrello inferiore <i>Lower truck</i>
1818/70	Guarnizione clip L=70mm <i>Clip gasket L=70mm</i>
1828/100	Guarnizione L=100mm <i>Gasket L=100mm</i>
02.UXR635	Tassello <i>Dowel</i>
02.VTSC4540Z	Vite 4.5x40 <i>Screw 4.5x40</i>
02.VMSCAT650Z	Vite autofornante M6x50 <i>Thread-forming screw M6x50</i>
1803	Profilo superiore L=1150/1450mm <i>Upper profile L=1150/1450mm</i>
1814	Profilo inferiore L=1150/1450mm <i>Lower profile L=1150/1450mm</i>
1815	Profilo intermedio L=1150/1450mm <i>Middle profile L=1150/1450mm</i>
1221	Guarnizione L=1150/1450mm <i>Gasket L=1150/1450mm</i>
1816	Profilo laterale L=2240/2840 mm <i>Lateral profile L=2240/2840 mm</i>
1817	Copertura laterale L=2240/2840 mm <i>Lateral cover L=2240/2840 mm</i>
1825	Maniglia <i>Handle</i>
1827	Profilo separatore L=1150/1450mm <i>Divider profile L=1150/1450mm</i>




Legenda altri componenti

Other items Legend

	1826	Trascinamento <i>Edge pull</i>
--	-------------	-----------------------------------


Sezione verticale / Vertical section

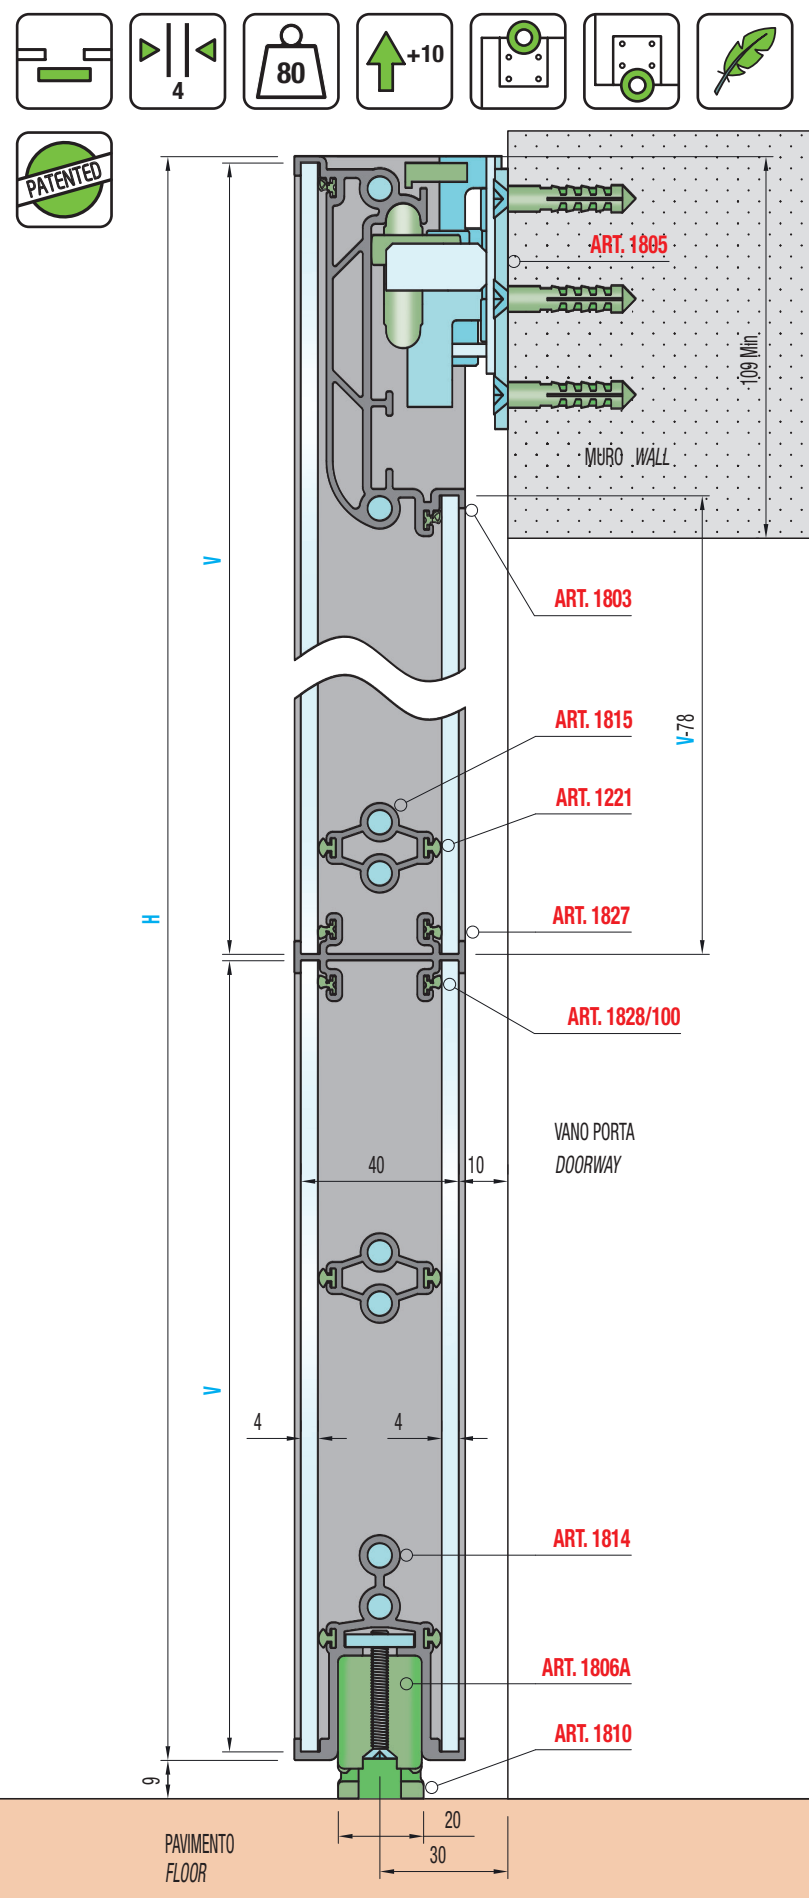

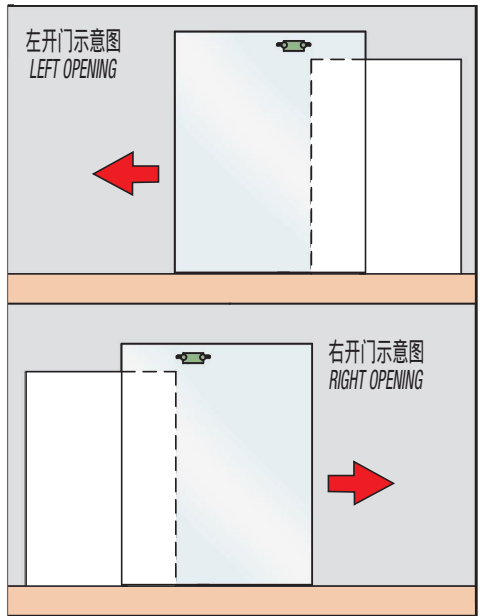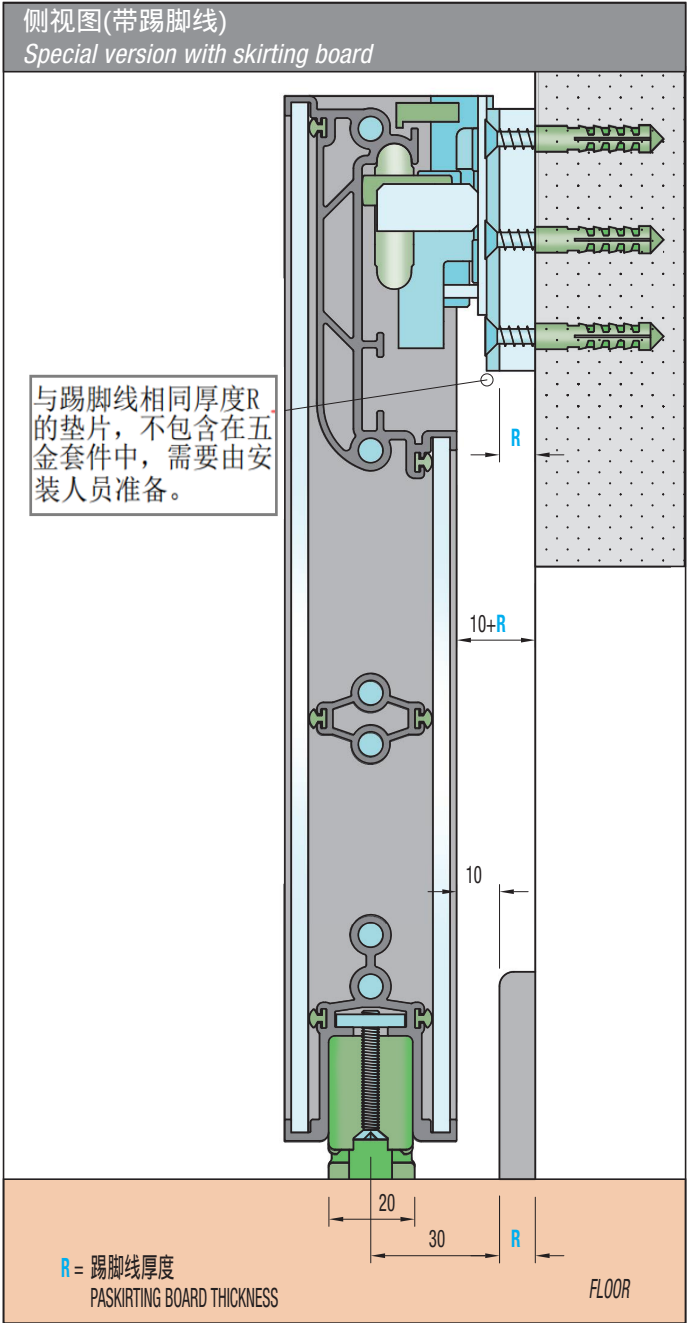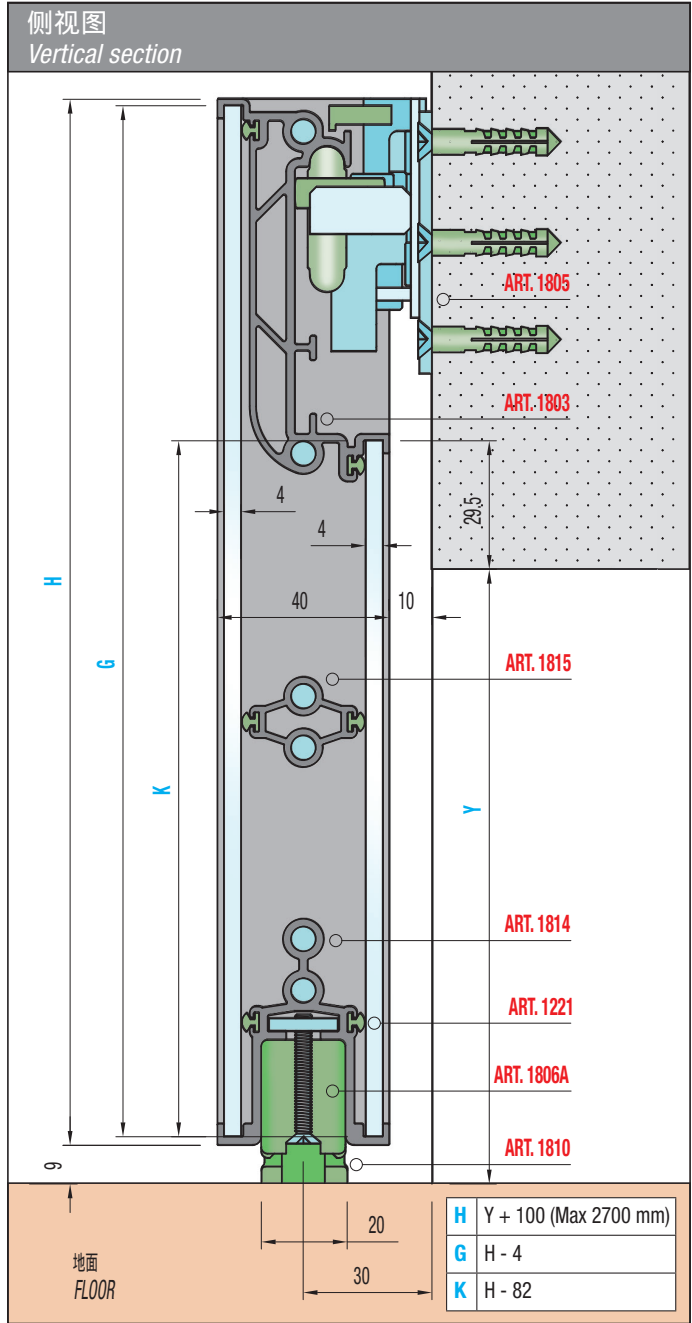



带2块双层玻璃的标准尺寸

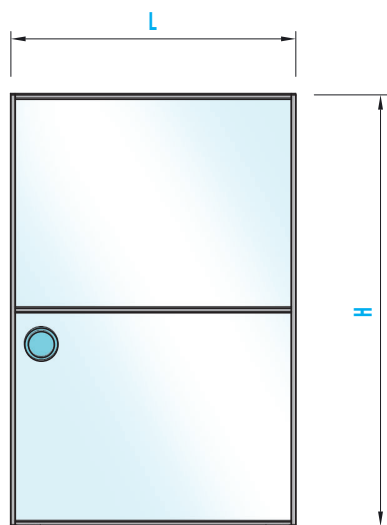

$$V = (H - 5) : 2$$

KIT 1800-2240-1170

H = 2240 / 2200 mm

L = MAX 1170 mm


KIT 1800-2840-1170

H = 2840 / 2765 / 2690


2615 / 2540 / 2465

2390 / 2315 mm

L = MAX 1470 mm

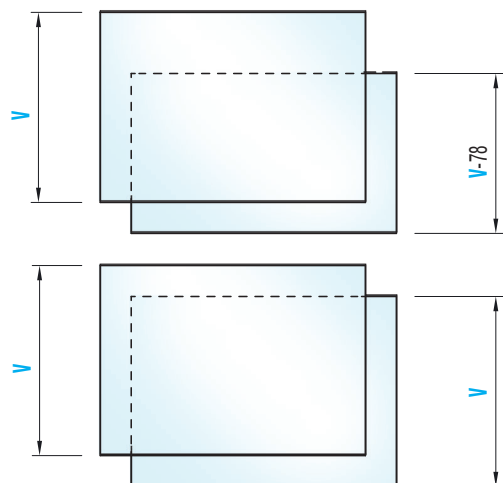

带3块双层玻璃的标准尺寸

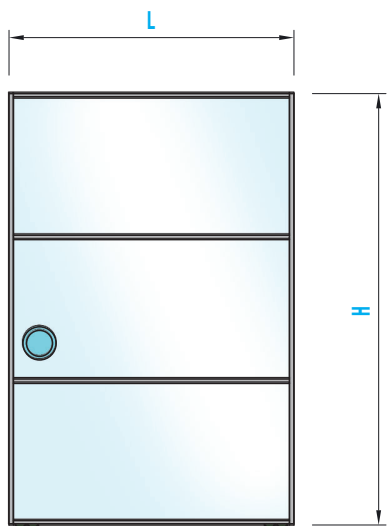

$$V = (H - 6.5) : 3$$

KIT 1800-2240-1170

H = 2240 / 2200 mm

L = MAX 1170 mm


KIT 1800-2840-1170

H = 2840 / 2765 / 2690


2615 / 2540 / 2465

2390 / 2315 mm

L = MAX 1470 mm

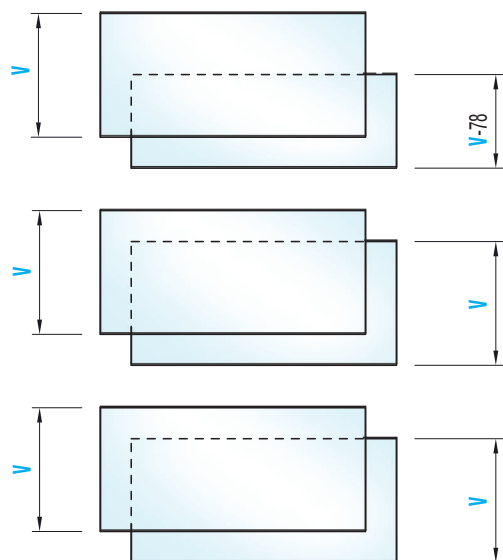

带4块双层玻璃的标准尺寸

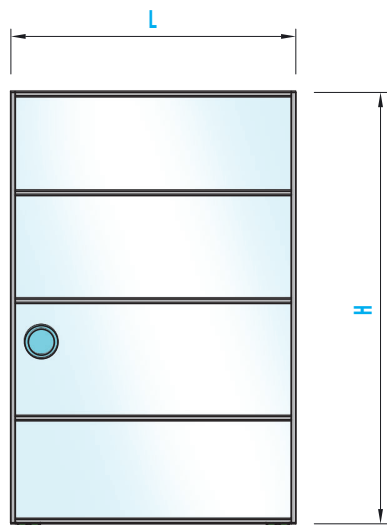

$$V = (H - 8) : 4$$

KIT 1800-2240-1170

H = 2240 / 2200 mm

L = MAX 1170 mm


KIT 1800-2840-1170

H = 2840 / 2765 / 2690

2615 / 2540 / 2465

2390 / 2315 mm



L = MAX 1470 mm



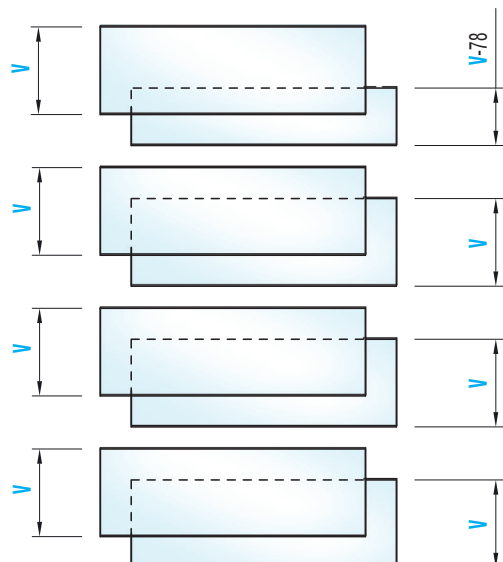


SERIE 1800 Hidden alu


SERIES 1800 Hidden alu

北京中意信诚贸易有限公司 www.china-era.com

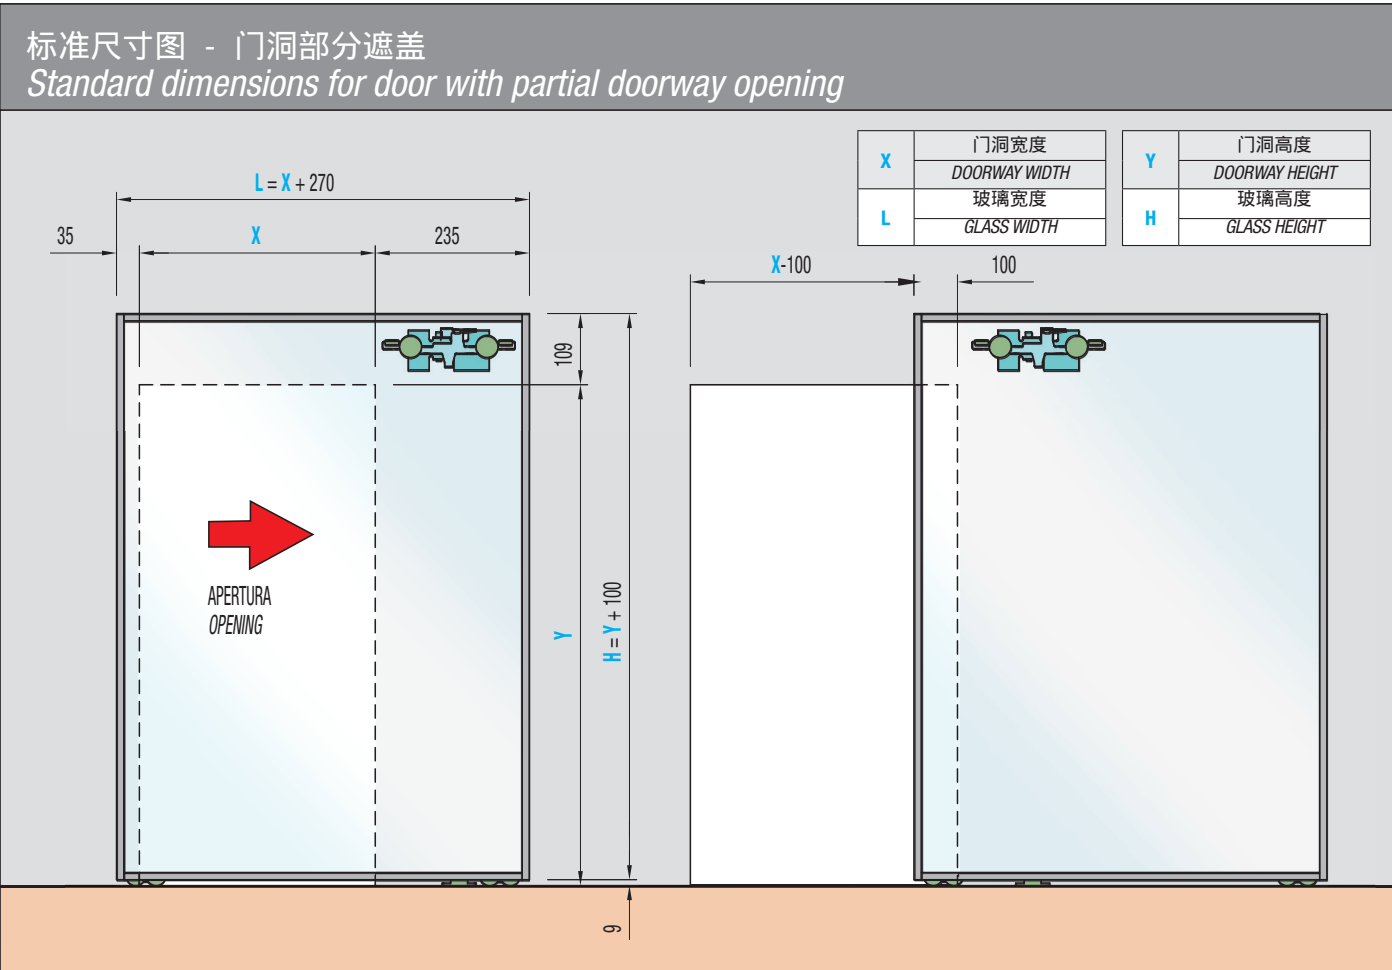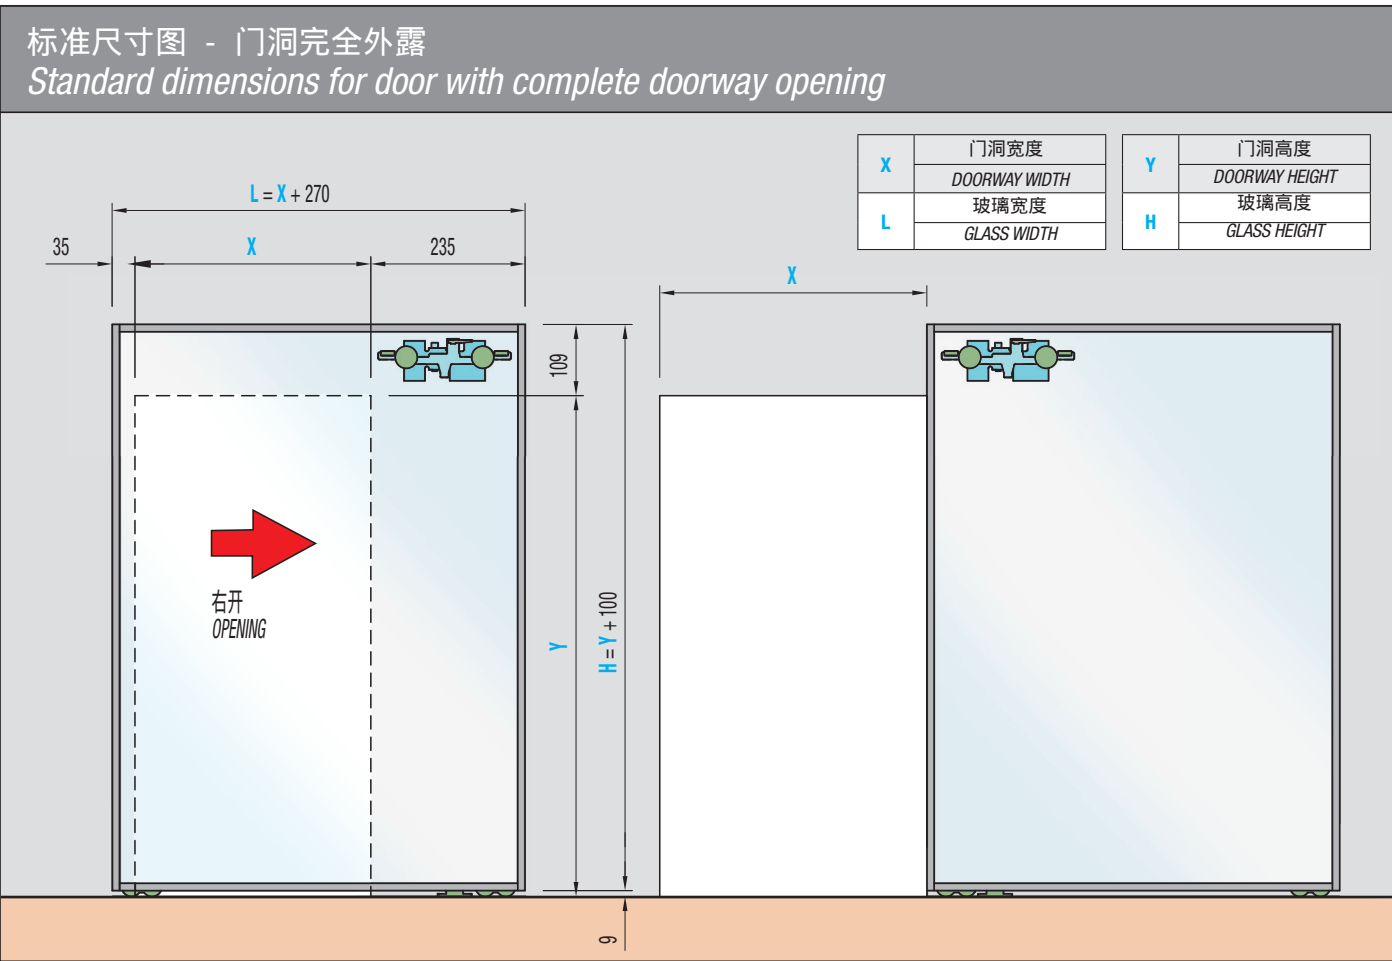

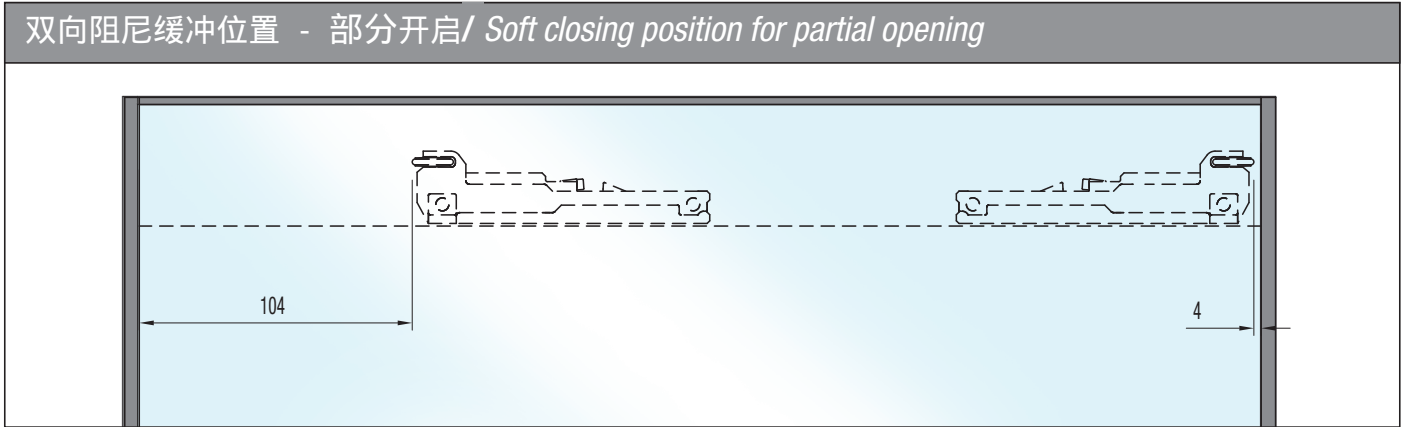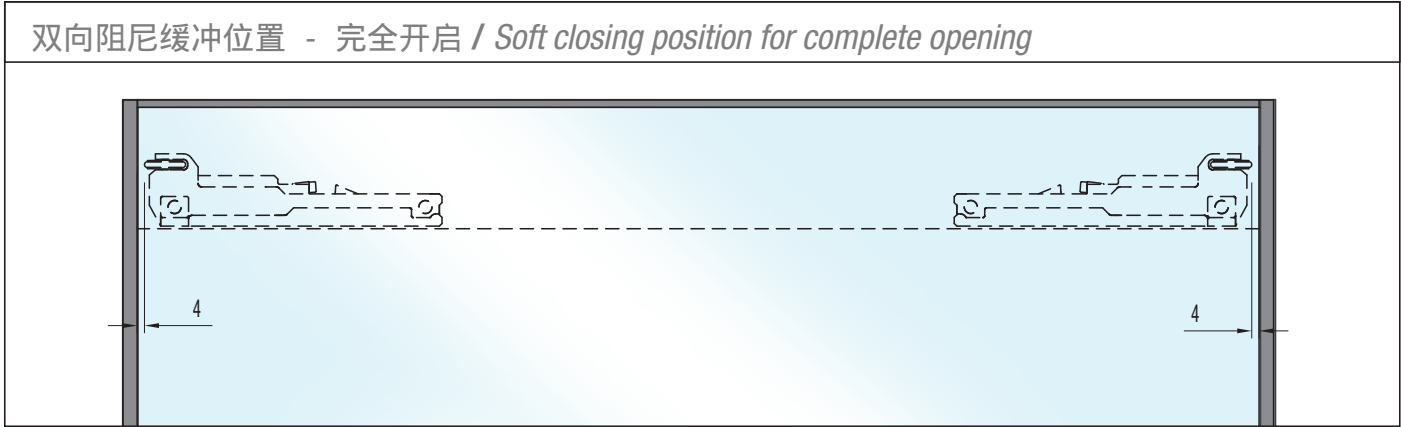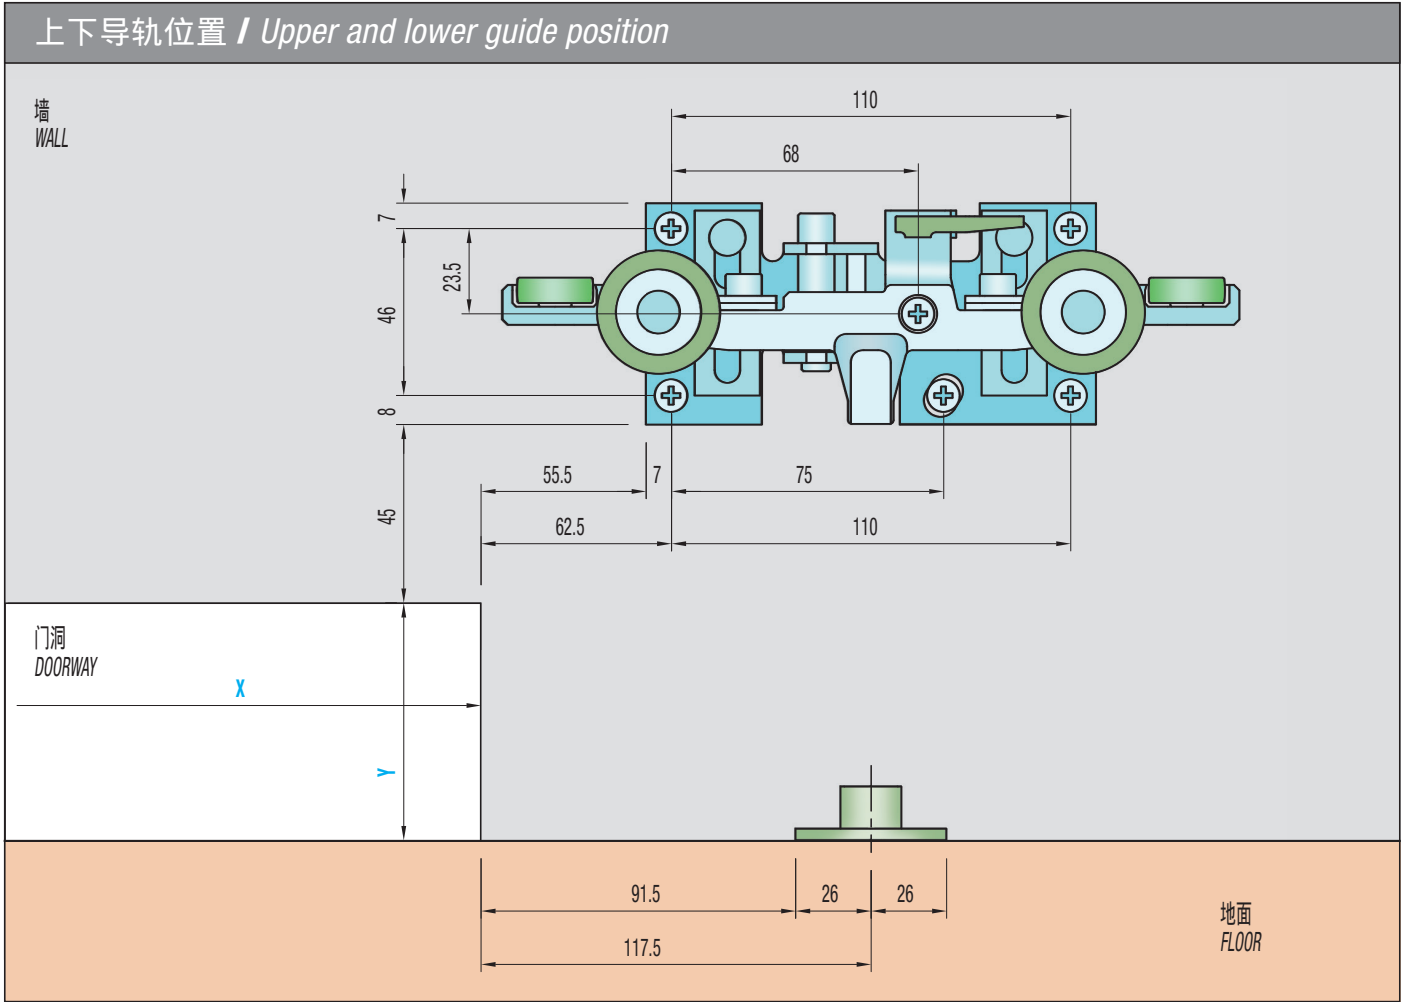


自激活装置 / Automatic self activating device

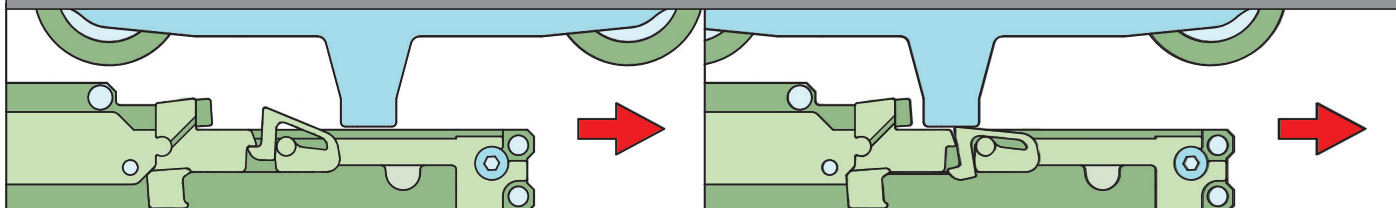

调节指导 / Assembly instructions


①

将上导轨的中心与门的中心线对齐，
如下图所示，
检查防脱扣是否被激活。
Fit the center line of the door close to the upper truck previously
fastened to the wall. Check that the clasp is not triggered,
as shown in the figures below.

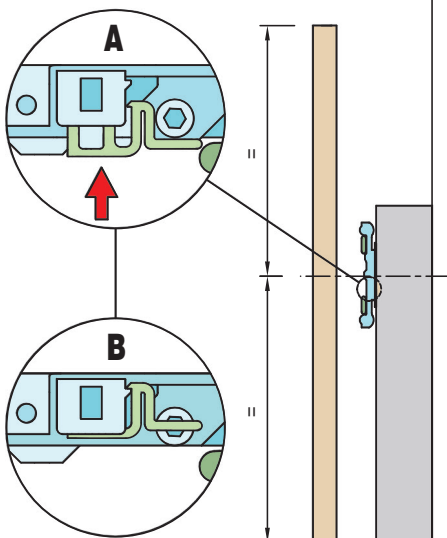



②

固定下滚轮 ART. 0106，
将门装在上导轨。
Position the door astride the runner ART. 0106 lying
the lower wheels on the ground.

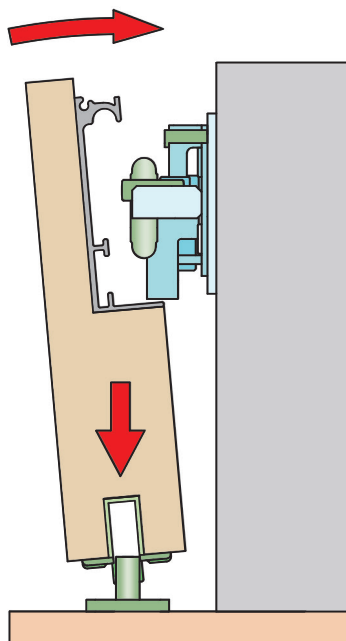


③


通过使型材靠在上支架的滚轮上，
使门处于垂直位置。将门一直压在上
支架上，直到组装结束。
Put the door in a vertical position, placing
its profile on the wheels of the upper truck.
Keep the door pushed against the upper
truck till the end of the assembly.

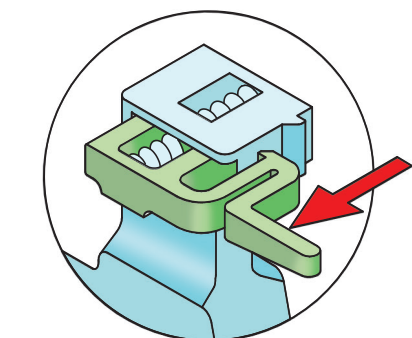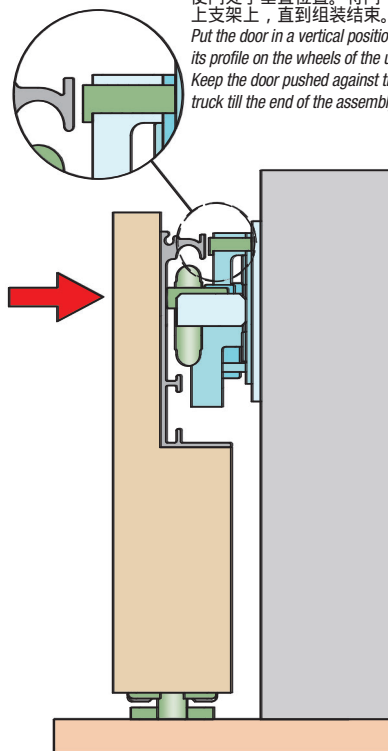



④ 拉开防脱扣
Pull the lever of the clasp.



⑤ 防脱扣自动放在上部型材上。
The clasp will automatically lie on the upper profile.



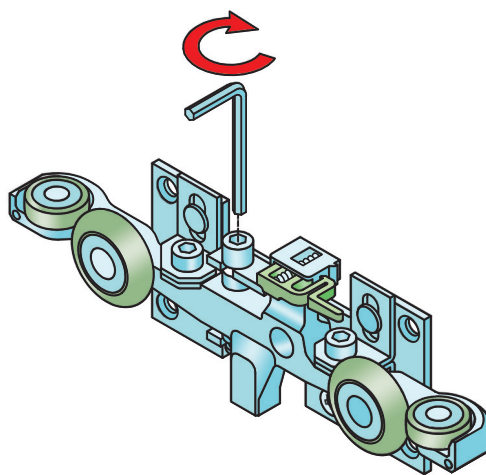


⑥ 拧紧壁挂支架的高度调节螺丝。
Fasten the screw for the adjustment
of wall bracket height.
向上拧摇杆，使滚轮靠近型材。
The rocker arm rises, moving the wheels closer to the profile.
当防脱扣发出“咯哒”声时，停止拧紧。
When the clasp makes a loud “Click”, stop fastening.

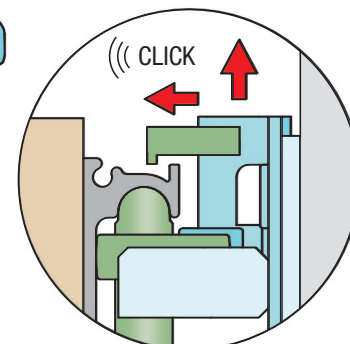

门与墙平行调整 / Door/Wall alignment adjustment


7

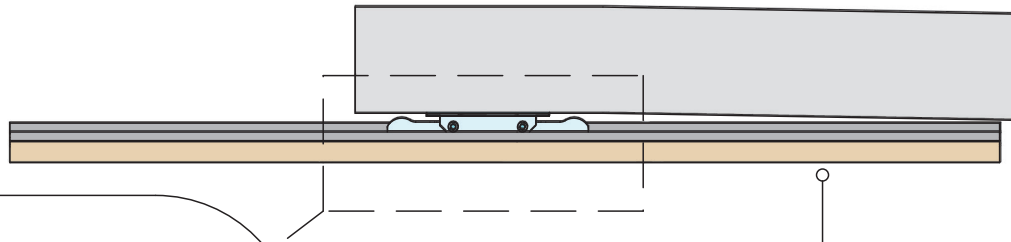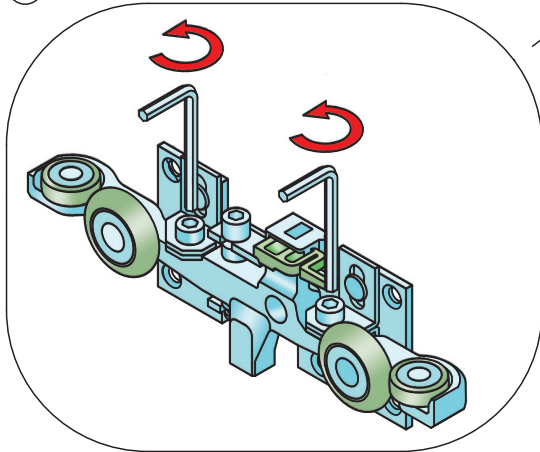

如果门与墙不平行，则松开两个螺丝。

IF THE DOOR IS NOT ALIGNED WITH THE WALL
LOOSEN THE FIXING SCREWS




8

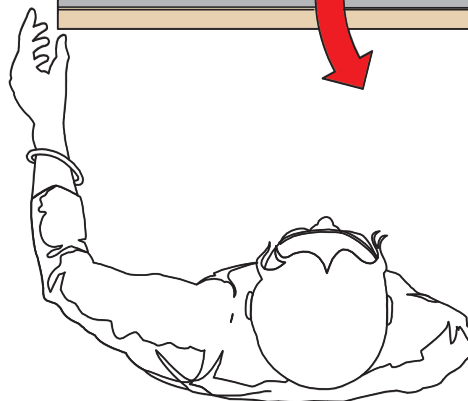

手动将门与墙平行

ALIGN MANUALLY THE DOOR WITH THE WALL

9

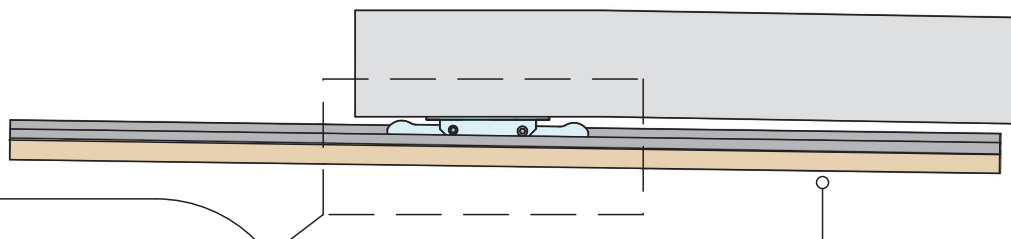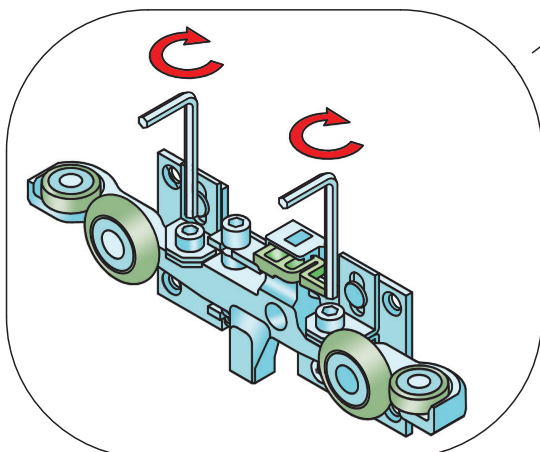

拧紧两个固定螺丝

LOCK THE ALIGNMENT SCREWING THE FIXING SCREWS



北京中意信诚贸易有限公司

BEIJING ZHONGYIXINCHENG TRADING CO.,LTD

北京市朝阳区广渠东路唐家村五号3-102

www.china-era.com

78500594@qq.com

13910114747

